




Omniscreen Hospitality & IPTV System

ENTERPRISE TV APPLICATION SERVER: Omniscreen Pilot Digital Signage and Content Management



KEY FUNCTIONS:

- MEDIA PROCESSING
- SERVICE MANAGEMENT
- CONTENT MANAGEMENT
- DEVICE MANAGEMENT
- Enterprise-grade Software and Hardware Package
- IPTV and Digital Signage delivery
- Integrated Live TV, On-demand Video and Signage
- Fully customizable
- Easy to use
- Reliable
- Live TV and Pay TV distribution with EPG
- Playback on TV, PC, tablet, smartphone
- Network-based video recording
- Personalised content and video/photo sharing
- Video On-Demand
- Emergency and general announcements
- Advertising and Digital Signage
- Scheduling and Playlists
- External information feeds (e.g. weather)
- Optional redundant configuration

All BLANKOM & Omniscreen products are very easy to use. Supplied with intuitive web-based interfaces, your system can be potentially used and managed from anywhere via an authorised PC, Mac, tablet or a smartphone.

Microsoft® Active Directory integration is available on request. Authorised users may have different access levels subject to their operational and/or corporate role within the customer organisation.

The end user interface can be customised to reflect corporate identity and branding on all supported devices.

The Omniscreen TV

System Product features:

Omniscreen Pilot™ is an enterprise TV and digital signage application server. It is usually provided as an appliance, but can be deployed in the Cloud as a SaaS offering.

Pilot is a versatile entertainment, information, and digital signage solution, which can be customised to most enterprise requirements including Government/ corporate offices, broadcast and AV studios, public venues, hospitals and aged care facilities, hotels/resorts, cruise ships, airlines and railways, mining camps, and other locations alike.


Omniscreen Pilot is a reliable solution proven in commercial deployments under 24/7 operating conditions.

www.omniscreen.com.au www.blankom.de







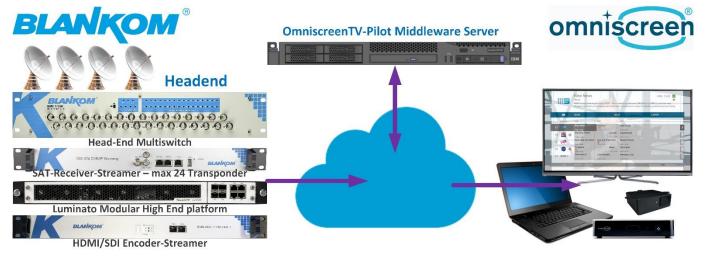

HARDWARE SPECIFICATIONS

Form Factor 1U Rackmount
Height 43mm (1.7")
Width 437mm (17.2")
Depth 249mm (9.8")
Weight Net: 3.62kg (8 lbs)

Gross: 5.44kg (12 lbs)

Power Supply:

200W Low Noise AC-DC power supply with PFC

AC Voltage 100 - 240V, 50-60Hz,

2.6 Amp Max

Operating Temperature:

Non-operating Temperature: Operating Relative Humidity:

Non-operating

Relative Humidity:

Front panel:

Buttons Power On/Off button

System Reset button LEDs Power LED Hard drive activity LED 2x Network activity LEDs 10°C to 35°C (50°F to 95°F) -40°C to 70°C (-40°F to 158°F) 8% to 90% (non-condensing)

5% to 95% (non-condensing)



Service Creation and Management

Simple web interface
Widgets (e.g. weather)
Live or pre-recorded video/TV
Scheduling
Playlists
External data feeds
Corporate training and data visualisation

Corporate training and data visualisation Custom industry solutions

Digital Signage

Includes integrated Signage Editor Add text, graphics, data

Add media (live TV and pre-recorded video content)


Create or Upload slides with rich content


Create Playlists

Schedule Playback

Preview Slides

Re-assign players from TV to Signage and back

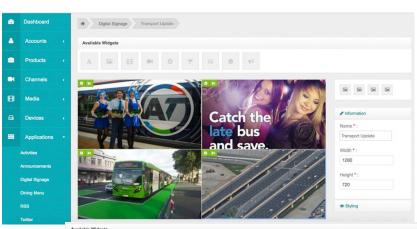

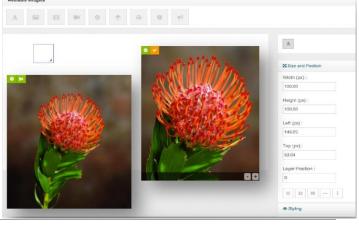







Media Management

Live TV
Photo
Movies
Corporate videos
User videos
Recorded content (optional)



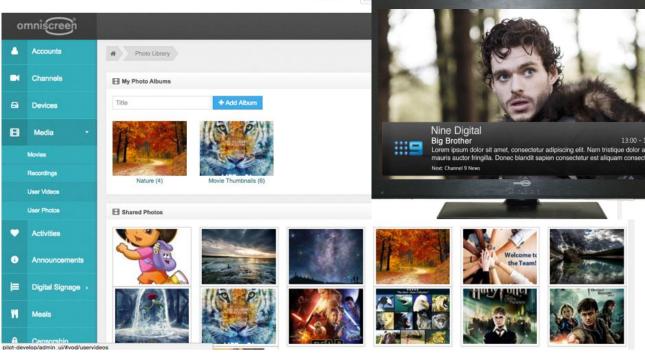

User Management

Owners/Administrators are always in control

Different Roles for different staff members

Full Name Michael Newman

Mobile 0400123456

Access to content is strictly controlled

Edit Account MNewman

Security management

Passwords and PINs
Optional corporate directory integration








Displays Menu on TV Custom design and flexible layout options Integrated with calendar Meals can be scheduled Easy to use | Control of the c

Time Tables and Announcements

Create electronic time tables for the venue Activities List for interest groups Display and Update Announcements

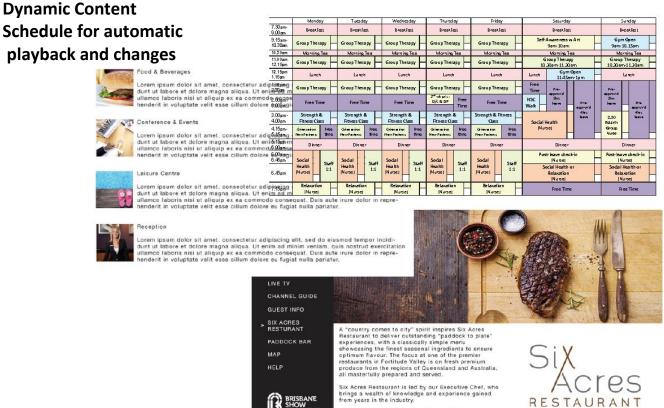

Open 7 days a week for Breakfast and Dinner.





End User Devices

Set-top Box for existing displays (PoE-support: AMINO)
Standard HDMI connection, new 4k STB available up 2 16weeks
Wired or wireless network interface,
Full remote service management and
device lifecycle support
Lightweight and
easy to install and replace

Supported TV API's:

 Vestel MB90/95, MB110 (separate firmware management app required);

Commercial LED panels available

- Philips 5010, 5011, 7011, 5014 and 6014;
 xx14 series properly support
 Android apps and Chromecast
- LG Pro: Centric
- SONY
- Samsung AE690 series:
 And we are working on their new Tizen models



New Release Most Popular Dramia Comedy Romance Documentray Truststar it Moust Alternity and 2010, 100 mins Alternity and 201

Companion Products

Omniscreen Touch Panel
Lose your remotes
Mobile Media Portal
Live TV
Video On-demand
Device Control Portal
Meal Ordering





Optional SetTopBox models available:

- Amino150 standard STB Android or
- AMINO 4K (new but actually has up to 16 weeks delivery time); Info coming soon
- The most cost effective h.264 compatible IPTV: OMM15 FullHD STB



Will be phased out and only 3-4k pcs

available...

References:

Hospitality and Healthcare:

Pathways Residences

Evermore

VCCC Melbourne

Ramsay Healthcare (multiple locations, large listed provider)

Rydges Hotels (Brisbane and Melbourne)

Tyrian Apartments

Accor Group: Headend's for Sofitel Darling Harbour, Park Royal Sydney, Pullman and Ibis Brisbane,

Singapore, etc.

Seasons Heritage

Emporium Southpoint

Hyatt Regency

Four Points by Sheraton

Southern Cross care

Melbourne Convention Centre

AUIB American University ... Bagdhad

Corporate and Government:

Royal Australian Navy

Federal Attorney General's Department

Defence Science and Technology Organisation

Ministry of Justice, New Zealand

Victoria Police

New Zealand Police

Woodside Energy Ltd

Department of Justice, Victoria

Telco and Broadcast Industry:

TransACT (now TPG Telecom Ltd)

Broadcast Australia

Nine Network Australia

Telikom PNG

Channels TV Nigeria

Digi TV Cambodia

Sky Network TV, New Zealand







CombiTel Group

Unit 12, 347 Bay Road, Cheltenham, VIC 3192, Australia

Has been assessed and certified by Compass Assurance Services to the following management systems, standards and guidelines:

ISO 9001:2015

QUALITY MANAGEMENT SYSTEMS

The scope of Certification covers the following activities:

We provide internet protocol television services including system design, software development and integration; and turnkey solutions as well as hardware and content package supply to government, corporate and community sector clients.

Managing Director, Compass Assurance Services







CERTIFICATION DATE:

DATE OF ISSUE:

EXPIRY DATE:

CERTIFICATE#:

20 November 2017

23 November 2017

20 November 2020

815-1466-02



Compass Assurance Services Pty Ltd Level 1, 135 Queen Street, Cleveland, 4163 QLD 1300 495 855 | compassassurance.com.au

Compess Assurence Services is eccredited by The Joint Accreditation System of Austrelia and New Zealand (www.jas-anz.org/register) - accreditation number: M5310713AO




THD + N

De-emphasis


Audio Bandwidth

Addon:

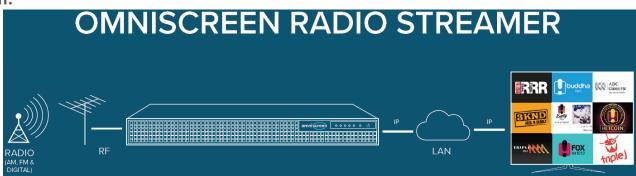

AM/FM/DAB/DAB+ RADIO STREAMER

OMNISCREEN RADIO is a fully configurable AM/FM/DAB/DAB+ radio streaming appliance designed for use in IPTV headends, radio broadcast monitoring and auditing. Includes our user-friendly webbased GUI with optional graphics add-ons for streaming radio stations as a TV channel.

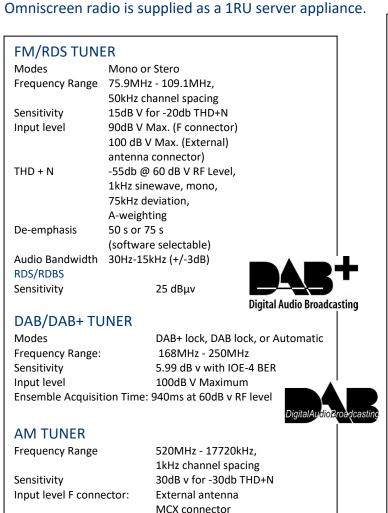

-50db @ 60dB V RF Level,

1kHz sinewave,

None or 50 s

75% modulation.

A-weighting, 2kHz

(software selectable)

100Hz - 2kHz (+/-3dB)

DIMENSIONS

Form Factor 1U Rackmount Height 43mm (1.7") Width 437mm (17.2") Depth 249mm (9.8")

FRONT PANEL

Buttons Power On/Off button System Reset button LEDs Power LED Hard drive activity LED 2x Network activity LEDs System Overheat LED

RF INPUT

Connector F-type 75 Ohm

NETWORK

Interface Ethernet 10/100 Base-T UDP/IP Multicast Protocols

UPD/IP Unicast RTP RTMP TCP/IP

RTSP SAP

ENVIRONMENTAL

RoHS Compliant RoHS Environmental Spec. Operating Temperature

10C to 35C (50F to 95 F)

Non-operating Temperature

-40C - 70C (-40F - 158F) 8% - 90% (non-

Operating Relative Humidity condensing)

Non-operating Relative Humidity 5% - 95% (non-

condensing)

POWER SUPPLY

400W Low Noise AC-DC power supply with PFC AC Voltage 100 - 240V, 50 - 60Hz,

ORDERING GUIDE

PART NUMBER DESCRIPTION

OMR8800 8 x AM/FM stations & 8 x DAB/DAB+ Radio stations

OMR8801 8 x AM/FM stations OMR8802 8 x FM/DAB/DAB+ Radio stations

OMR8804 16 x AM/FM stations

OMR8806 16 x FM/DAB/DAB+ Radio stations

