


# Sat-IF-Distribution-Amplifier

## BMA 91-24A

## 9 Line Amplifier 24 dB

- **9-Line amplifier 24 dB for 8 Sat + terr. Input**
- Switchable remote powering
- small compact size
- **power saving - step down technology**
- high isolation between polarizations
- Attenuation 15 dB
- return loss < 10 dB (low bit errors)
- F-pitch compatible to multiswitch, taps / splitter and DCSS switches
- Made in Germany

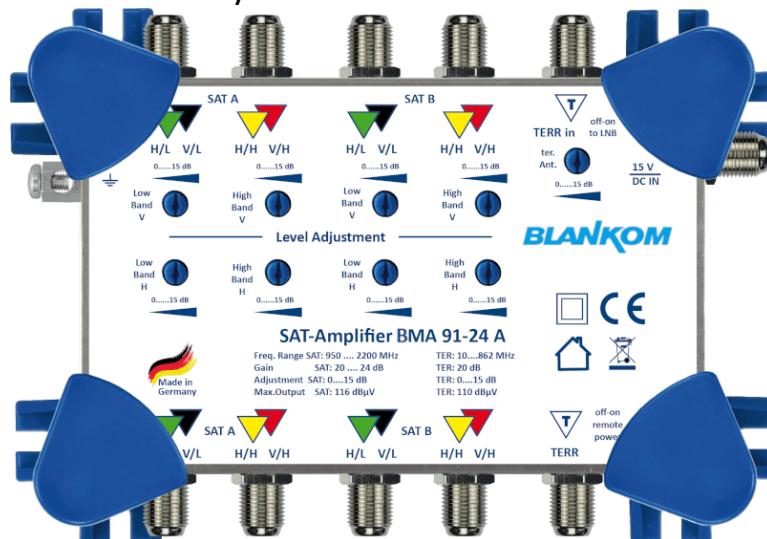

Type	BMA 91-24A	
Feature	9 Line amplifier 24 dB	
Inputs	1 x terr.	8 x Sat
Outputs	1 x terr.	8x Sat
Frequency range	40-862 MHz	950-2200 MHz
Gain	20 dB	20...24 dB
Attenuation	15 dB	15 dB
Isolation polarisations	-	30 dB
Isolation terr. /Sat	30 dB	-
Max. output level	110 dBuV *	116 dBuV *
Current consumption	390 mA	
Max. total remote feed current	2 A	
Optional remote power	15 V DC	
Ambient temperature range	-20 °C ... +55°C	
Dimensions	162 x 112 x 63 mm	
Weight	410 g	

\* Terr. EN50083-5, 60-dBKMA, SAT EN50083-3, 35-dB-IMA