


# Sat-IF-Distribution Multisplitter

## 5 Line 2 way Multisplitter

### BSS 55-02

- 5-Line splitter with 4 Sat + terr. inputs**
- robust die cast frame
- small compact size
- high isolation between polarizations
- return loss < 10 dB (low bit errors)
- F-pitch compatible to our multiswitch series, amplifier and opt. dcss switches
- Made in Germany

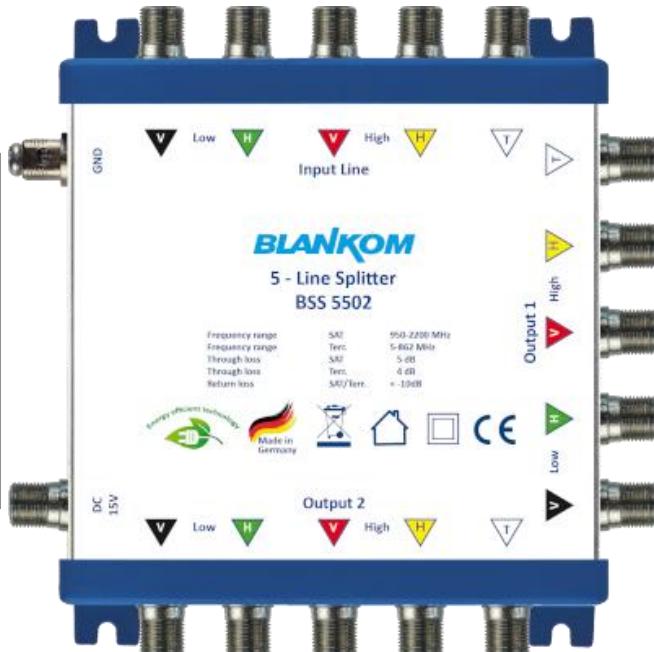

Type	BSS 55-02	
Feature	2-way splitter, terr. passive	
Inputs	1 x terr.	4 x Sat
Outputs	2 x terr.	2 x (4x Sat)
Frequency range	5-862 MHz *	950-2200 MHz
Insertion loss	3,2...4,1 dB +/-0,5 dB	3,5...4,1 dB +/-0,5 dB
Isolation polarisations	-	40 dB
Isolation terr. /Sat	30 dB	-
Current consumption splitter	< 10 mA	
Max. total remote feed current	2A	
Optional remote power	12...20V (ext.15V DC PSU available)	
Ambient temperature range	-20 bis +55°C	
Dimensions	136 x 136 x 36 mm	
Weight	390 g	

\* Terr. EN50083-5, 60-dBKMA, SAT EN50083-3, 35-dB-IMA (T – active)

Änderungen vorbehalten! / Subjects to change without notification!