


Sat-IF-Distribution - Multitap**5 Line Multitap 1 way / 2 way****BST 55-01** 1 way 12 dB**BST 55-11** 1 way 12...25dB

- **5-Line Multitap 1 way for 4 Sat + terr. input**
- robust die cast frame
- Attenuator Sat / terr. - option
- small compact size
- Option: with attenuator 12...25 dB
- high isolation between polarisations
- return loss < 10 dB (low bit errors)
- F-pitch compatible to splitter/taps, amplifier and dcss switches
- Made in Germany

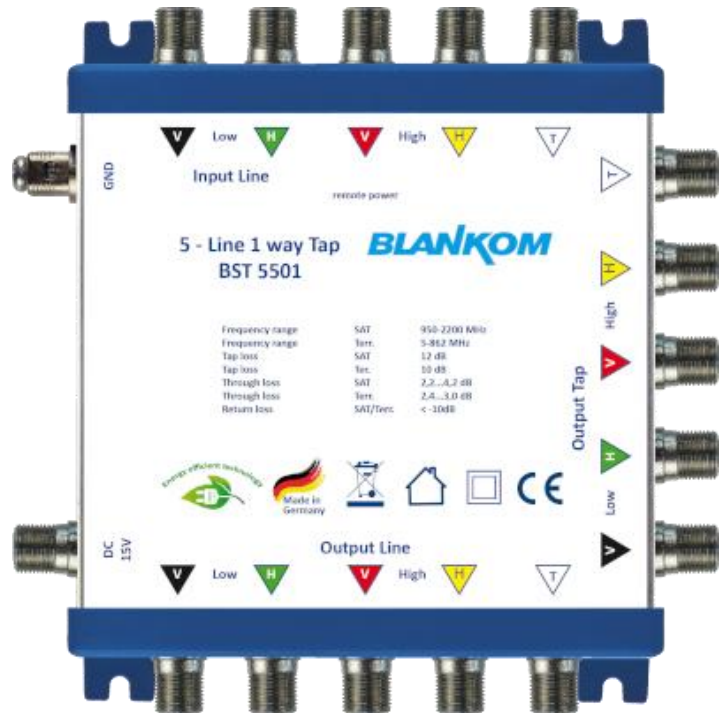

Type	BST 55-01		BST 55-11	
Feature	1 / 2-way multitap, passive			
	Terr.	Sat	Terr.	Sat
Inputs	1 x terr.	4 x Sat	1 x terr.	4 x Sat
Outputs tap	1 x terr.	4 x Sat	2 x terr.	2 x (4x Sat)
Frequency range	5-862 MHz *	950-2200 MHz	5-862 MHz *	950-2200 MHz
Tap loss	12 dB	13 dB	12 dB	15...12 dB *
Through loss line	1,5 dB	3 dB	1,5 dB	3 dB
Attenuation optional	15 dB	15 dB	15 dB	15 dB
Isolation polarisations	-	30 dB	-	30 dB
Attenuation (option)	-	15 dB	-	15 dB
Current consumption tap	< 10 mA		< 10 mA	
Max. remote current	2 A			
Optional remote power	12...20 V (opt. 15VDC PSU available)			
Ambient temperature range	-20 bis +55°C			
Dimensions	136 x 136 x 36 mm		136 x 136 x 36 mm	
Weight	400 g		400 g	
* Band start...end				

Änderungen vorbehalten! / Subjects to change without notification!