

IGS-924 24 Tuner to IP Gateway

IGS-900 = 16 Tuner instead 24



IGS-924 (C/T) – new Version V3 with loops



IGS-924 Version V2 w/o RF-loop

Datasheet and operation Manual

V 1.1

Table of Content

TABLE OF CONTENT	2
INTRODUCTION:.....	3
FEATURES.....	3
SPECIFICATIONS (DVB-T/T2/C ETC. UPON REQUEST).....	4
CONNECTING:	5
SAFETY AND OTHER RECOMMENDATIONS:	7
IMPORTANT NOTES!	7
INSTALLATION NOTES	9
QUICK-START INSTALLATION:	9
MPTS-MODE:	14
NETWORK SETUP:	20
CHANGING A USER-ACCOUNT:.....	21
SET DATE AND TIME AS NTP:	21
TUNER-SETUP:.....	21
ASI-INPUT(S): (IGS-924 HAS ONE ONLY):	28
SPTS OUTPUT SETTINGS:	28
STREAM OUTPUT SETTINGS IN SPTS:	32
CHECK RTSP:.....	34
PLAYBACK INFO-CHANNEL FROM USB-PEN:	36
SOFTWARE UPDATES:	39
IGS-924C 24X DVB-C/T(2)/ISDB-T MULTITUNER -NEW DESIGN.....	45
ANNEX MPEG	47
MPEG PSI/SI Information's:	47
RECOMMENDATIONS:	48
INSTALLATION GUIDE FOR F-CONNECTORS:.....	53
APPENDIX A	54
INSTALLATION AND SAFETY INSTRUCTIONS / MONTAGE UND SICHERHEITSHINWEISE	55
Umrechnungstabelle dBµV <-> dBm / <i>Conversions of Power @ 75Ω</i>	57
CONTACT:.....	60
Document History:	60
DVB-C CHANNEL PLAN.....	61


Introduction:

The BLANKOM IGS-924 is a high performance and cost-effective SPTS or MPTS IP streamer.

Equipped with 24 DVB-S/S2x FTA (Free to Air unencrypted) tuner inputs, with BISS de-scrambling capabilities, up to 2x 512 SPTS Stream channels through Gigabit Ethernet ports (parallel operation as redundant stream-I/O). Depending on the chosen mode, the device can operate in SPTS (IPTV) Mode or 2x12 pass through MPTS-Mode (DVB over IP) by selecting it (device need to reboot after changing).

To meet customers' various requirements, this device is also equipped with 1(2) ASI input port which selected services can be streamed to the Gbe output. The ASI out are only used in MPTS mode.

The BLANKOM IGS-924 is also characterized with a high integration level, high performance and very cost effective. This streamer is very adaptable to new generations of IPTV headend systems i.e., in hospitality environments serving FreeToAir (FTA) content and BISS encrypted Services.

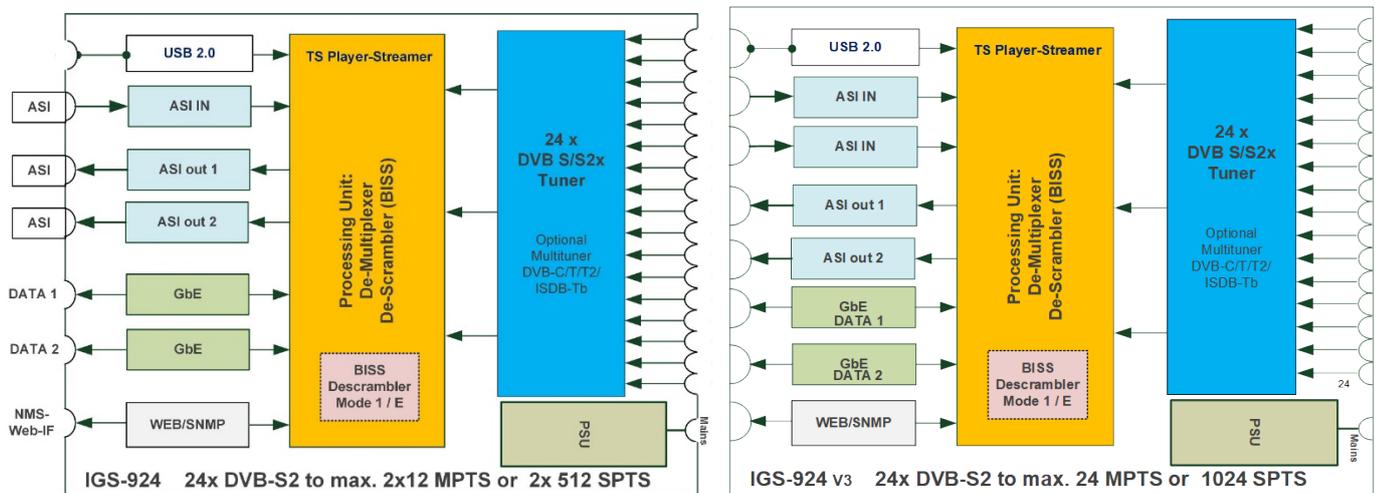

Features

- 24 modern Tuner inputs DVB-S/S2/S2x up to 32APSK (DVB-C, DVB-T/T2, ATSC/ISDB-Tb optional)
- Supporting DiSeqC commands for up to 4 Satellite positions
- 1 (2) ASI input, IP-Input, 2x parallel ASI out (MPTS)
- 2 Gigabit Ethernet (GE) output, DATA1 + DATA2 up to 2x 850 Mbps (SPTS or MPTS)
- IP (2x 512 SPTS or 2x 12 MPTS) over UDP, RTP / RTSP output
- BISS Service de-scrambling Mode 1 and E
- Accurate PCR adjusting (SPTS)
- CA-PIDs filtering and PID re-mapping (SPTS)
- "Null PKT Filter" function (MPTS)
- Webserver for inbuilt Network Management System (NMS) on 100BaseT Rj45. V2: LCD and Keypad
- Updates via WEB-IF

Depending on the region to be delivered, the power cords can be different like EURO or UK versions.

New Feature Dec. 2024 added:


DVB-T2 MI Multistream reception from Satellite Transponders with Gold code and ISI

Specifications (DVB-T/T2/C etc. upon request)

Input		24 tuner input + 1 or 2 x ASI in, TS Player ->SPTS/MPTS output			
Tuner Section	<i>Option: Multi-mode tuners</i>	DVB-C	Frequency In	60...890MHz	
			Standard	J.83A(DVB-C), J.83B, J.83C	
			Constellation	16/32/64/128/256 QAM	
		DVB-T/T2	Frequency In	60...890MHz	
			Bandwidth	6/7/8 M bandwidth	
		ISDB-T, ATSC	Frequency In	60...890MHz	
		Satellite	DVB-S	Frequency In	950...2150MHz
				Symbol rate	0.5...45Msps
				Signal Strength	-65... -25dBm
	FEC			1/2, 2/3, 3/4, 5/6, 7/8	
	Constellation			QPSK	
	Max input bitrate			≤ 125 Mbps	
	DVB-S2		Frequency In	950...2150MHz	
			Symbol rate	QPSK/8PSK /16APSK :0.5...45 MSps 32APSK: 0.5...34MSps;	
			FEC	QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10	
			Constellation	QPSK, 8PSK, 16APSK, 32APSK	
			Max input bitrate	≤ 125 Mbps	
			DVB-S2X	Frequency In	950...2150MHz
	Symbol rate			QPSK/8PSK /16APSK :0.5...45 Msps 8APSK: 0.5...40Msps 32APSK: 0.5...34Msps	
	FEC			QPSK: 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 13/45, 9/20, 11/20 8PSK: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 8APSK: 5/9-L, 26/45-L 16APSK: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10, 1/2-L, 8/15-L, 5/9-L, 26/45, 3/5, 3/5-L, 28/45, 23/36, 2/3-L, 25/36, 13/18, 7/9, 77/90 32APSK: 3/4, 4/5, 5/6, 8/9, 9/10, 2/3-L, 32/45, 11/15, 7/9	
	Constellation			QPSK, 8PSK, 8APSK, 16APSK, 32APSK	
	Max input bitrate			≤125 Mbps	

BISS Descrambling	Mode 1, Mode E (Up to 850Mbps) (descrambling individual program's)	
Output	2x 512 SPTS IP mirrored output over UDP and RTP/RTSP protocol through GE1 & GE2 port (IP address and port number of GE1 and GE2 are independent), Unicast and Multicast	
	2x12 MPTS IP output (for Tuner/ASI passthrough) over UDP and RTP/RTSP protocol through GE1 and GE2 port, Unicast and Multicast	
	2 parallel ASI output –in MPTS-mode, TS-Player-Streamer from connected USB-PEN	
System	Web-Server based management via 100BaseT port	
	software upgrade via Web-IF	
Miscellaneous	Dimension	482mm×230mm×44mm (W×L×H)
	Approx. weight	3.6kg
	Environment	0...45°C (working condition); -20...80°C (in Storage)
	Power requirements	100...240VAC, 50/60Hz
	Power consumption	20W

Connecting:

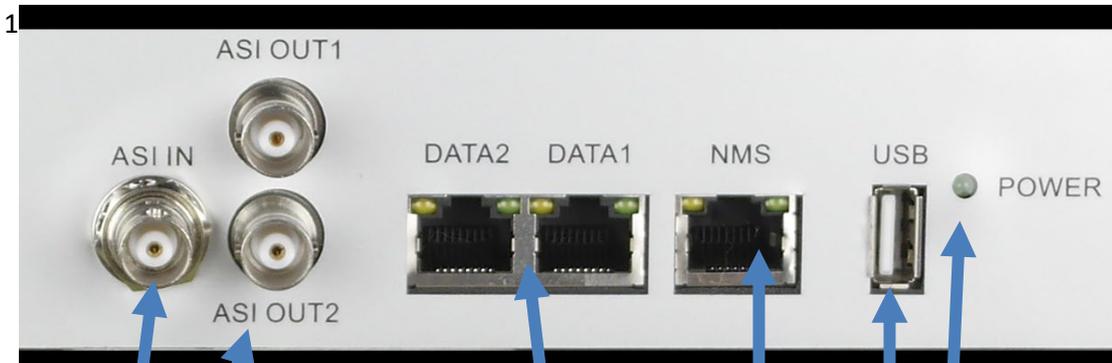

1	Power indicator
2	NMS port: Network management interface
3	USB port for TS Player
4	DATA 1 +2 port (GE1&GE2) : IP out port
5	ASI input port
6	Parallel ASI-out ports



Power switch, Fuse, IEC Male AC IN,



RF-Inputs F-female 75 Ohm Bottom: 1 – 12 Top: 13-24


New Front IGS-924C (V3):



With LCD and keypad for basic information's: E.g.: IP address of NMS -port will be shown per default.

To access the device, press the LOCK-button first than you can use Menu/Enter and Arrow keys.

Difference to the old IGS-924 Version: The Power-Button is now at the Front, 1 more ASI-IN port – which can be used for Streaming demultiplexing as well as USB- TS-Player:

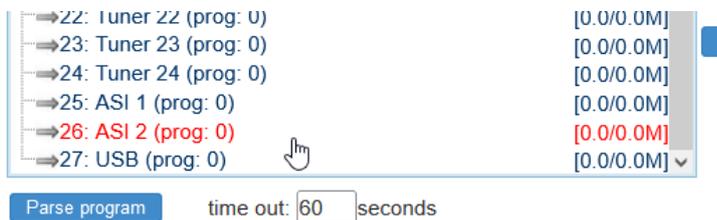


The rear panel has different Tuner now with Loop outputs. These should only be used looping if you are staying on the same SAT-polarization and same Low- or High band as the one you are looping from first.

Example: Tuner 234 are looped starting with Tuner 1:

#	Tuner	TS Lock	Signal	Parameters	Action
1	DVB-S2	47.585 Mbps	Quality: 53% Strength: 67% Power: -32.69 C/N: 13.25 BER: 0.0E+00	Frequency: 10803.000 MHz LNB Frequency: 9750.000 MHz Symbolrate: 22000 Ksps LNB Voltage: 18V 22K: OFF Satellite: 1	Edit
2	DVB-S2	35.481 Mbps	Quality: 52% Strength: 71% Power: -28.34 C/N: 13 BER: 0.0E+00	Frequency: 10921.000 MHz LNB Frequency: 9750.000 MHz Symbolrate: 22000 Ksps LNB Voltage: 0V 22K: OFF Satellite: 1	Edit
3	DVB-S2	42.586 Mbps	Quality: 53% Strength: 70% Power: -29.21 C/N: 13.25 BER: 0.0E+00	Frequency: 10891.000 MHz LNB Frequency: 9750.000 MHz Symbolrate: 22000 Ksps LNB Voltage: 0V 22K: OFF Satellite: 1	Edit
4	DVB-S2	47.585 Mbps	Quality: 43% Strength: 69% Power: -30.51 C/N: 10.75 BER: 0.0E+00	Frequency: 10773.000 MHz LNB Frequency: 9750.000 MHz Symbolrate: 22000 Ksps LNB Voltage: 0V 22K: OFF Satellite: 1	Edit

All are in the same Low band (22KHz=Off) and using horizontal (18V): So only Tuner 1 need to tell the RF-Source (SAT-Multiswitch): The 18V DC must be switched ON, the other 3 do not need to switch it on and can stay OFF (0V).

CATV / DVB-C LOOPINGS:

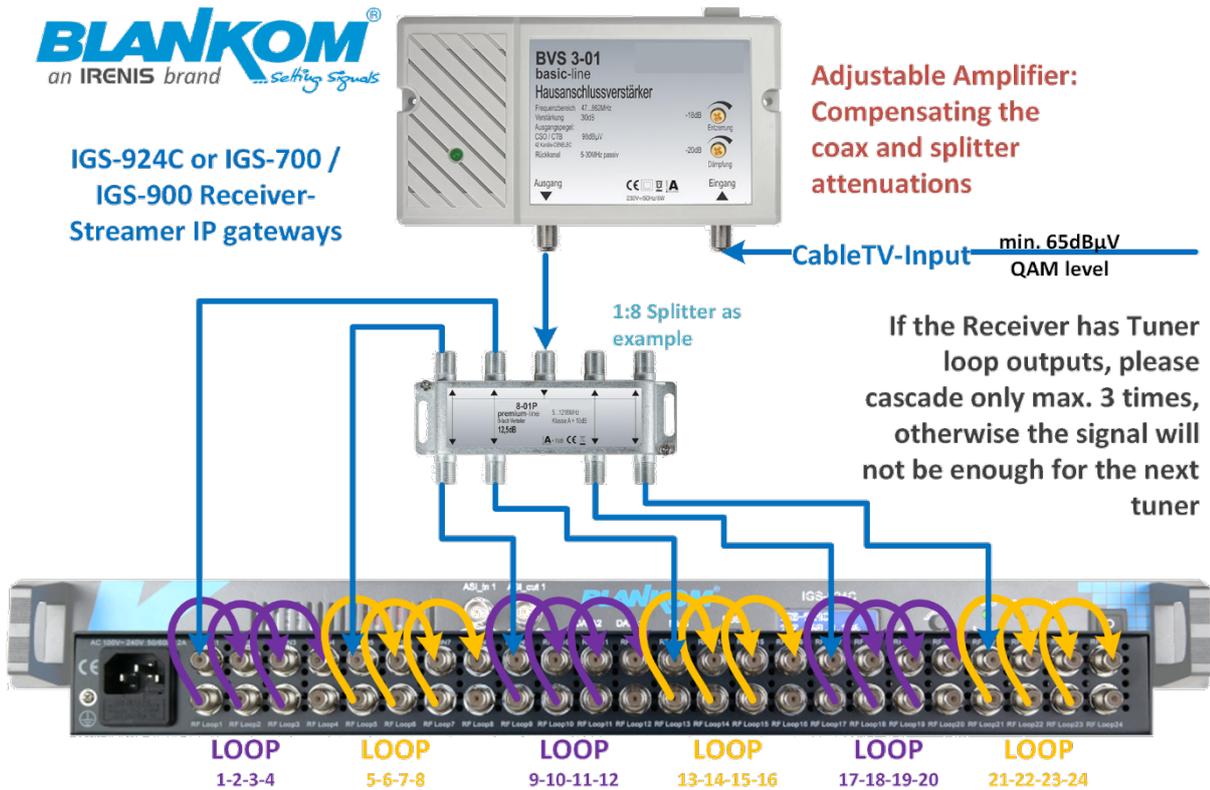

We recommend not to loop more than 3 times (same for SAT tuner) and use an external splitter with a pre-installed Amplifier to give the receiver – tuner inputs normed/measured levels. For long coax cables please also consider the slope correction in the amplifiers to compensate the attenuations in higher frequency ranges.

Safety and other recommendations:

Assure climatic environment rules for electronic machines like this, Grounding rules as well. Installation should be done by a certified electrician.

⚠ Caution:

Before connecting power cord to Tuner to IP Gateway, you should set the power switch to “OFF”.

Do not connect the RF-cable (F-plugs) when the unit is running.

Important Notes!

This manual is for use by qualified personnel only. Handling this device or system requires special electronic technical knowledge. To reduce the risk of electrical shock or damage to the equipment, do not perform any servicing other than the installation and operating instructions contained in this manual unless you are qualified to do so. This device operates in the given voltage and frequency range without requiring manual adjustment.

Do not open the top case w/o unplugged power source because serious injury or death may be the result! Inside are components under risk from electrostatic discharge. To avoid equipment damages do not touch these components or, observe the respective handling rules!

For continued protection against fire, the fuses may only be replaced by identical fuses with the same electrical specifications which are designed for the corresponding fuse positions.

No part of this publication may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation or adaptation) without the written permission from Blankom / IRENIS GmbH.

IRENIS GmbH reserves the right to revise this publication and make changes in its content from time to time, whereby it shall not be obligatory for IRENIS GmbH to provide notification of such revision or change. IRENIS GmbH provides this manual without warranty of any kind, neither implied nor expressed, this includes also any warranties regarding the merchantability and fitness for a particular purpose. IRENIS GmbH may improve this manual or make changes in the products described herein at any point of time.

This Product is manufactured in PRC (China), HS-Code: 85176200



Anmerkung:

Alle von uns veröffentlichten Betriebsanleitungen richten sich an den Antennen- und IT-Fachmann, der über grundlegende Kenntnisse der Empfangs-, Netzwerk- und Anlagentechnik verfügt. Die Einhaltung aller relevanten Vorschriften und Richtlinien für den Aufbau und Betrieb von solchen Anlagen obliegt dem Installateur und/oder dem Betreiber. Insbesondere sind die in den jeweiligen Ländern geltenden Vorschriften und Richtlinien für die Inbetriebnahme speziell für den Stromanschluß und alle mit den Produkten in Zusammenhang stehenden und geltenden Normen und Gesetze einzuhalten.



Remark:

All operating instructions published by us are intended for the antenna and IT specialist who has basic knowledge of reception, network and system technology. Compliance with all relevant regulations and guidelines for the installation and operation of such systems is the responsibility of the installer and/or the operator. In particular, the regulations and guidelines applicable in the respective countries for commissioning, especially for the power connection, and all standards and laws related to the products must be complied with.

Annotation:



Tous les modes d'emploi que nous publions sont destinés aux professionnels de l'antenne et de l'informatique qui ont des connaissances de base en matière de réception, de mise en service et de technologie des équipements. Le respect de toutes les réglementations et directives pertinentes pour l'installation et l'exploitation de ces équipements relève de la responsabilité de l'installateur et/ou de l'exploitant. En particulier, il convient de respecter les réglementations et directives applicables dans les pays respectifs pour la mise en service, notamment pour le raccordement électrique, ainsi que toutes les normes et lois relatives aux produits.

Annotazione:



Tutte le istruzioni per l'uso da noi pubblicate sono destinate al professionista dell'antenna e dell'informatica che ha una conoscenza di base della tecnologia di ricezione, di rete e delle apparecchiature. Il rispetto di tutti i regolamenti e le norme guida pertinenti per l'installazione e il funzionamento di tali sistemi è responsabilità dell'installatore e/o dell'operatore. In particolare, devono essere rispettati i regolamenti e le norme guida applicabili nei rispettivi paesi per la messa in funzione, soprattutto per il collegamento alla rete elettrica e tutte le norme e le leggi relative ai prodotti.

Anotación:

Todos los manuales de instrucciones que publicamos están dirigidos a especialistas en antenas y TI que posean conocimientos básicos sobre tecnología de recepción, redes e instalaciones. El instalador y/o el operador son responsables del cumplimiento de todas las normas y directrices pertinentes para la instalación y el funcionamiento de dichos sistemas. En particular, deben cumplirse las normas y directrices vigentes en los respectivos países para la puesta en servicio, especialmente en lo que se refiere a la conexión eléctrica, así como todas las normas y leyes aplicables relacionadas con los productos.

Anotação:

Todos os manuais de instruções publicados por nós destinam-se a especialistas em antenas e TI com conhecimentos básicos sobre tecnologia de recepção, redes e instalações. O cumprimento de todas as normas e diretrizes relevantes para a montagem e operação de tais instalações é da responsabilidade do instalador e/ou do operador. Em particular, devem ser cumpridas as normas e diretrizes aplicáveis nos respetivos países para a colocação em funcionamento, especialmente no que diz respeito à ligação à corrente elétrica, bem como todas as normas e leis aplicáveis relacionadas com os produtos.

Traduzido com a versão gratuita do tradutor - DeepL.com

Installation Notes

All types of the IRENIS-BLANKOM family are 19" devices with 1 RU height designed for installation in 19" racks. In addition to the front panel screws, an internal module support is required at the rack.

Depending on the Frontend used and the operating adjustments, the RF-input port carries DC Voltage (13V /18V, max. 400 mA).

By connecting a mains cable, the device can become functional without any auxiliary appliances. The power supply units are almost (! Please check rear) designed for the wide range of 100-230V AC, 50/60Hz; a manual adjustment of the voltage is not necessary.

For some models, the second power connector is feeding another independent power supply for internal redundancy. For a maximum of redundancy, both power supplies should use different circuits.

All the outputs are decoupled from one another. Thus, the circuit does not have any effect on the functioning of the device. Connections that are not required need not to be terminated.

Suggestion: CAT 6E Ethernet cable for Gigabit-Ethernet

Note:

Ipv4 global scope sessions use **multicast addresses** in the range 224.2.128.0 – 224.2.255.255 with SAP Announcements being sent to 224.2.127.254 Port 9875 (note that 224.2.127.255 is used by the obsolete SAPv0 and MUST NOT be used).

Ipv4 administrative scope sessions using administratively scoped IP multicast. The multicast address to be used for announcements is the highest multicast address in the relevant administrative scope zone.

For example, if the scope range is 239.16.32.0 – 239.16.33.255, then 239.16.33.255 is used for SAP Announcements.

Quick-Start Installation:

The user can control and set the configuration of the device with any computer by connecting to the web server-Interface (WebIF) by the **100BaseT NMS** Port. The user should ensure that the computer's IP address is different from other device's IP address; otherwise, it might cause an IP conflict. Be sure to set it in the same network range.

Default Login-Data is 192.168.0.136 (default factory address) are **admin/admin**:

Note: We recommend using always the newest version of the browser Firefox.

Melden Sie sich an, um auf diese Website zuzugreifen.

Autorisierung angefordert von http://192.168.0.139
Ihre Verbindung mit dieser Website ist nicht sicher.

Benutzername:

Kennwort:

Which lets you start in the STATUS display:

IGS-924

BLANKOM®

Summary

- Status

Parameters

- Tuner
- TS Config
- USB Media

System

- Network
- Password
- Configuration
- Firmware
- Log

Device Information

BLANKOM®

System Information

Software Version:	11.01.59 Build 158.00 Nov 14 2022
Hardware Version:	05.01.0a
Web Version:	1.06
System Version:	2.20.1.83
Product ID:	03508b00-00000010-00000000-00000000
Temperature:	65.34 Degree Celsius
VccInt:	984.38 mV
VccAux:	1807.62 mV
VccBRam:	985.11 mV
Uptime:	0 Day-00:06:45

NOTE:

The unit's Web-Interface is also reachable by

<http://IP-Address of connected DATA-Port 1 or 2:> (see also network section and later)

Apply

DATA1

IP Address:

Subnet Mask:

Gateway:



MAC Address:

Apply

Please note, the DATA-GbE Port default settings are different than shown here.


Usually, the device will be shipped in MPTS mode (BYPASS) and the config-Menus are logically different in SPTS and MPTS

Please select the operating mode for SPTS (default) or MPTS in the Firmware section:

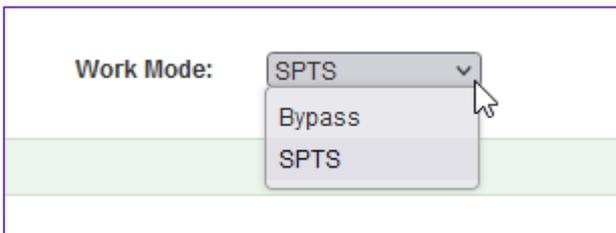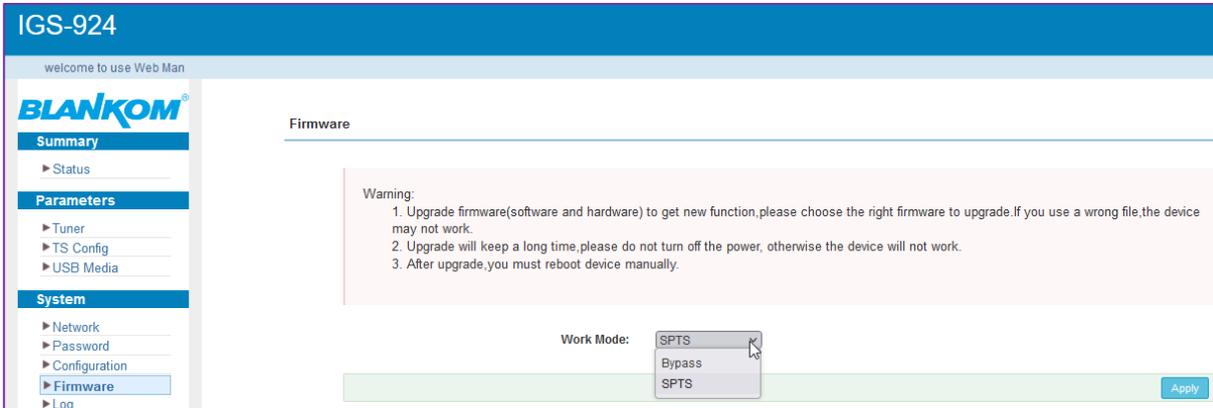

Bypass means MPTS 1:1 transponder to IP stream

output

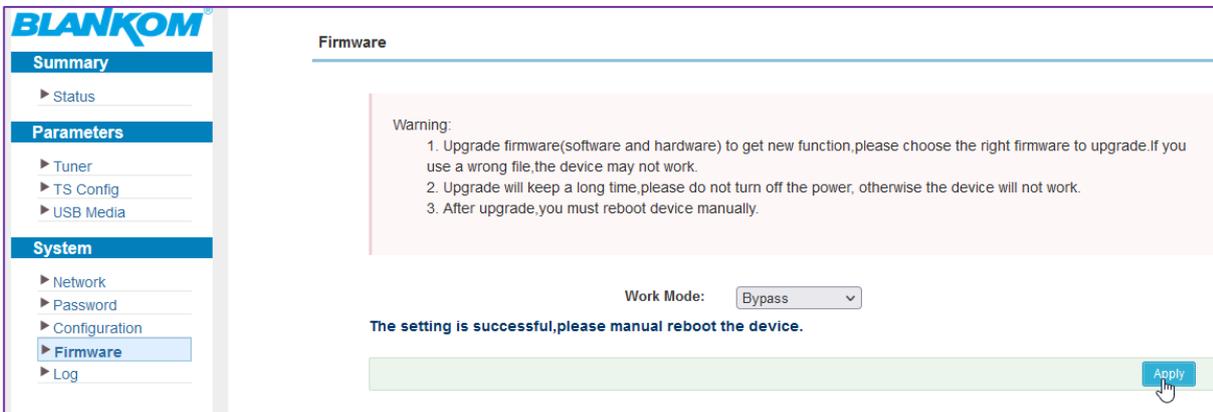

Note:

If you change the **SPTS mode** to **MPTS** (and vice versa) you need to backup your settings before the change. It doesn't accept the previous saved settings from the SPTS or MPTS mode because they are different. Sounds logical, isn't it?

Just to show the difference for MPTS – outputs – only 24 IP streams can be assigned. You should decide whether a stream goes through GbE DATA1 or DATA2 so please balance the MPTS streams if more than 800 Mb/s are to be streamed.

Manually reboot is needed if you switch the modes ByPass MPTS <-> SPTS and maybe **better to save the config first to external file on a PC...**

IGS-924

2022-12-02 14:18:52 [Ex

BLANKOM®

- Summary
 - Status
- Parameters
 - Tuner
 - TS Config
 - USB Media
- System
 - Network
 - Password
 - Configuration**
 - Firmware
 - Log

Configuration

Save Restore Factory Set Backup Load

When you change the parameter,you should save configuration ,otherwise the new configuration will lost after reboot.

Save config

config.bin
Fertig — 23,1 KB

Alle Downloads anzeigen

Configuration

Save Restore Factory Set **Backup** Load

Backup current configuration to the local file,we suggest do this before set the configuration or update firmware.

Backup config

LOAD:

Sie möchten folgende Datei öffnen:

config.bin
Vom Typ: Binary File (658 KB)
Von: http://192.168.0.136

Wie soll Firefox mit dieser Datei verfahren?

Öffnen mit


Datei speichern

Für Dateien dieses Typs immer diese Aktion ausführen





OK Abbrechen

The file can be uploaded by LOAD CONFIGURATION.


The Safe-Restore menu is self-explaining: It internally SAVES or RESTORE the settings.

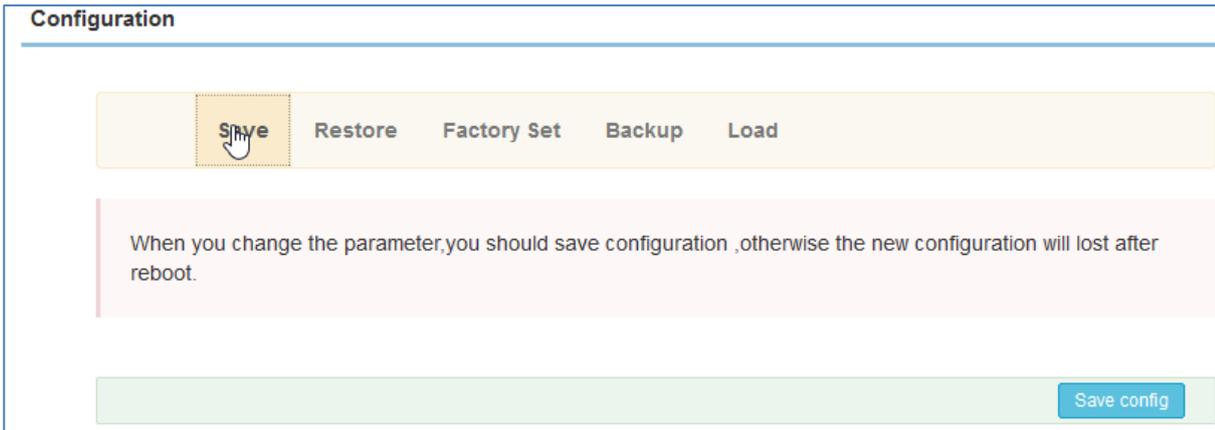

Load an external previously saved config is almost a good idea:

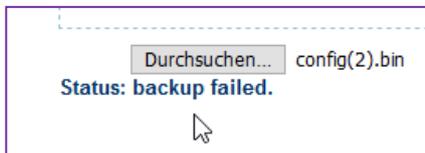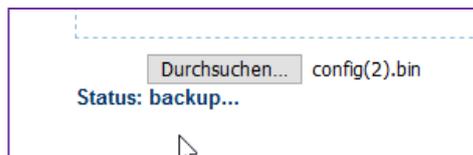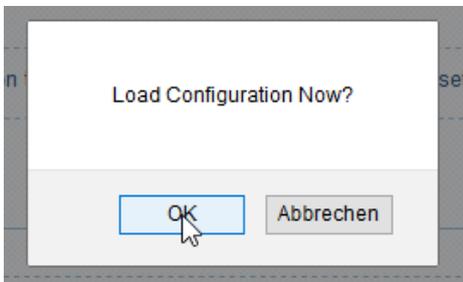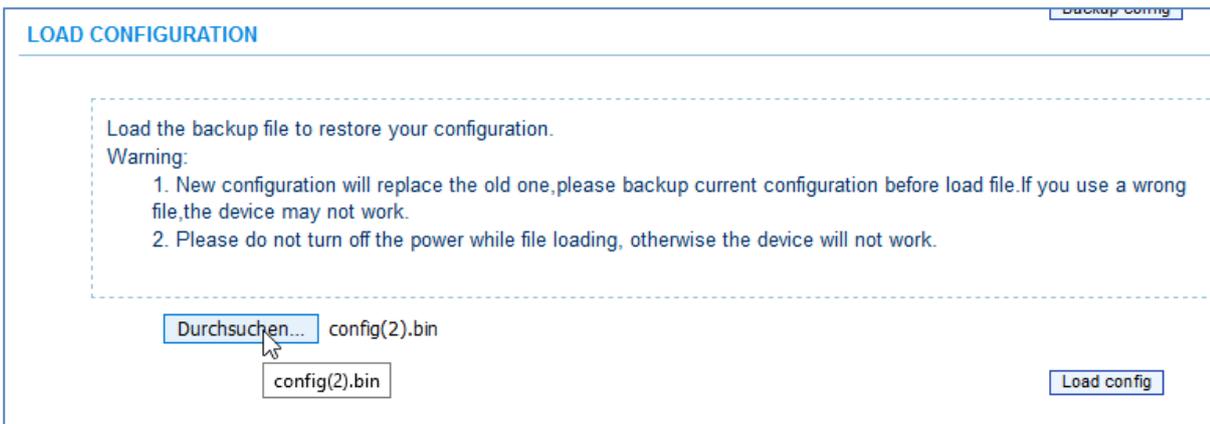

Success...
Backup config...

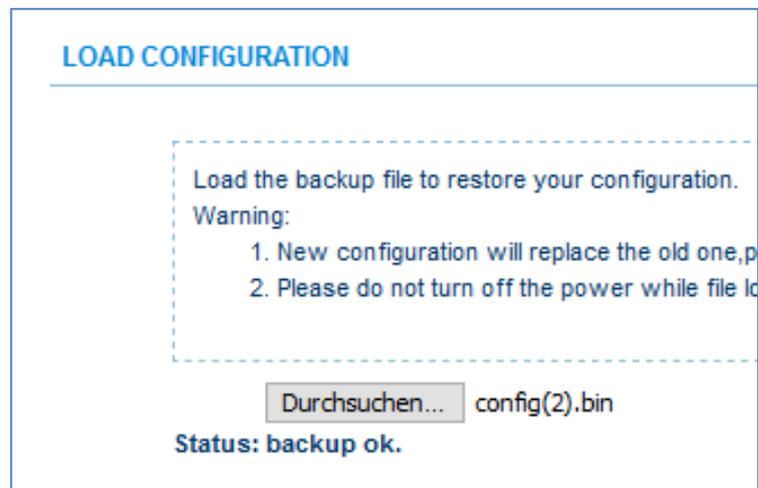

MPTS-Mode:

Tuner Configuration

#	Tuner	TS Lock	Signal	Parameters	Action
1	DVB-S2X/S2	0.000 Mbps	Quality: 0% Strength: 0% Power: -64.43 dBm C/N: 0.00 dB BER: 1.0E-09	Satellite Freq: 3840.000 M LNB Freq: 5150.000 M Symbolrate: 27500 K	Edit
2	DVB-S2X/S2	0.000 Mbps	Quality: 0% Strength: 0% Power: -84.86 dBm C/N: 0.00 dB	Satellite Freq: 3840.000 M LNB Freq: 5150.000 M Symbolrate: 27500 K	Edit

Adjust a tuner input – same like in SPTS :

> DVB-S2, 8PSK, Frequenz 10773 MHz, Polarisation H, Symbolrate 22000, FEC 3/4 Audio Infos | Crypt Infos

Sender (6) / DTV / Status / Land / Kategorie	SID / Video PID / Audio PID / PCR PID / VT PID / Update
ANIXE HD HD Allgemein	21100 255 259 deu 255 0 01.03.2011
Genius Plus Shopping	21113 3327 3328 deu 3327 0 10.02.2015
HSE HD HD Shopping	21104 1279 1283 deu 1279 36 27.01.2022
Nicer Dicer TV Shopping	21112 3071 3072 deu 3071 0 25.01.2022
QVC HD HD Shopping	21103 1023 1027 deu 1023 35 01.09.2011
ShopLC HD HD Shopping	21107 511 512 deu 511 0 11.01.2022 513 eng

CH 1 Config ✕

Satellite Frequency: MHz

LNB Frequency: MHz

Symbolrate: Ksps

LNB Voltage: ▾

22K: ▾

Satellite: (1-4)

Tuner Configuration

#	Tuner	TS Lock	Signal	Parameters	Action
1	DVB-S2X/S2		Quality: 0% Strength: 0% Power: -64.43 dBm C/N: 0.00 dB BER: 1.0E-09	Satellite Freq: 3840.000 M LNB Freq: 5150.000 M Symbolrate: 27500 K	Edit

Loading, please wait...

IGS-924 Management

Tuner Configuration

#	Tuner	TS Lock	Signal	Parameters	Action
1	DVB-S2X/S2	45.875 Mbps	Quality: 50% Strength: 65% Power: -34.86 dBm C/N: 12.50 dB BER: 0.0E+00	Satellite Freq: 10773.000 M LNB Freq: 9750.000 M Symbolrate: 22000 K	Edit
2	DVB-S2X/S2	46.997 Mbps	Quality: 53% Strength: 65% Power: -34.86 dBm C/N: 13.25 dB BER: 0.0E+00	Satellite Freq: 10803.000 M LNB Freq: 9750.000 M Symbolrate: 22000 K	Edit

Be patient and sometimes the tuner values appear after you make your Content parsing on:

Program Parse

- Lose → Locked
- 1: Tuner 1 (prog: 0/9) [46.3/47.9M]
- 2: Tuner 2 (prog: 0/9) [46.8/47.9M]
- 3: Tuner 3 (prog: 0) [0.0/0.0M]
- 4: Tuner 4 (prog: 0) [0.0/0.0M]
- 5: Tuner 5 (prog: 0) [0.0/0.0M]

By selecting and PARSE it:

Parse program time out: 60 seconds

Back to the tuner menu shows its reception:

Tuner Configuration

#	Tuner	TS Lock	Signal	Parameters	Action
1	DVB-S2X/S2	44.712 Mbps	Quality: 50% Strength: 65% Power: -34.86 dBm C/N: 12.50 dB BER: 0.0E+00	Satellite Freq: 10773.000 M LNB Freq: 9750.000 M Symbolrate: 22000 K	Edit
2	DVB-S2X/S2	46.711 Mbps	Quality: 53% Strength: 65% Power: -34.86 dBm C/N: 13.25 dB BER: 0.0E+00	Satellite Freq: 10803.000 M LNB Freq: 9750.000 M Symbolrate: 22000 K	Edit

Follow that for every tuner input and maybe ASI IN:

#	IP Address	Port	Protocol	Data Out	Null PKT Filter	Status	Bit(Act/Max)
Tuner 1	224.2.2.2	2001	UDP	DATA1	<input type="checkbox"/>	●	46.0/47.9 M
Tuner 2	224.2.2.2	2002	UDP	DATA1	<input type="checkbox"/>	●	46.8/47.9 M

The 2 ASI OUT-ports are double so working in parallel and work only with MPTS.

Select which tuner goes out to ASI:

#	IP Address	Port	Protocol	Data Out	Null PKT Filter	Status	Bit(Act/Max)
Tuner 1	224.2.2.2	2001	UDP				

The package or Byte mode can be chosen...

#	IP Address	Port	Protocol	Data Out	Null PKT Filter	Status	Bit(Act/Max)
Tuner 1	224.2.2.2	2001	UDP	DATA1	<input type="checkbox"/>	●	45.2/47.9 M
Tuner 2	224.2.2.2	2002	UDP	DATA1	<input type="checkbox"/>	●	46.7/47.9 M

We select the streaming out:

Channel 1 Config. [close]

Enable:

IP Address:

Port:

Protocol:

Null PKT Filter:

Chose UDP or RTP/RTSP to enable the multicast in parallel with the RTSP unicast (see below in this manual).

Check whether you want to parse the CBR-stream which includes the PID8191 Zero packets for the Constant Bitrate or w/o Zeros as VBR-Stream:

Enable:
 IP Address:
 Port:
 Protocol:
 Null PKT Filter:

IMPORTANT:
 Do not use the default IP settings for the UDP/RTP multicast streams. At least increase the IP numbers. Otherwise, your connected L3 IGMP switch will pass all streams with same IP address. The Port No should be also different. E.g.: 225.1.1.1:10000, next 225.1.1.2:10002, ...

VBR:

No PID8191dec = no Zero packets

CBR: with PID 8191dec

Because we are just transporting 1:1 the TS Input to a Stream output no content can be edited except the BISS key (see below in the manual)

Program Parse

- ⇒ Lose ⇒ Locked
- ⇒ 1: Tuner 1 (prog: 0/9)
- ⇒ 2: Tuner 2 (prog: 0/9)
- ⇒ 3: Tuner 3 (prog: 0/26)
- 1: [10350] rbb Brandenburg HD
 - Program Number: 10350
 - Service Type: 0x19
 - Service Provider: ARD
 - PMT PID: 0x14b4
 - PCR PID: 0x14bf
 - Elements
 - MPEG-4 Video PID: 0x14bf
 - MPEG-1 Audio PID: 0x14c0
 - MPEG-1 Audio PID: 0x14c1
 - MPEG-1 Audio PID: 0x14c5
 - Private PES PID: 0x14c2
 - AC3 Audio PID: 0x14c4
 - User defined PID: 0x087b
 - User defined PID: 0x0880
 - Private Sections PID: 0x0eba
 - User defined PID: 0x0ebc
 - Private PES PID: 0x14c3

Parse program time out: 60 seconds

Program Information [close]

Service Name:

Program Number:

Biss Key:

Service Type:

Service Provider:

PMT PID:

PCR PID:

MPEG-4 Video PID:

MPEG-1 Audio PID:

MPEG-1 Audio PID:

MPEG-1 Audio PID:

Private PES PID:

AC3 Audio PID:

User defined PID:

User defined PID:

Private Sections PID:

User defined PID:

Private PES PID:

Another VBR example:

Tuner 17	224.2.2.2	2017	UDP	DATA2	<input checked="" type="checkbox"/>	●	19.2/42.6 M	
Tuner 18	224.2.2.2	2018	UDP	DATA2	<input checked="" type="checkbox"/>	●	17.4/33.8 M	
Tuner 19	224.2.2.2	2019	UDP	DATA2	<input checked="" type="checkbox"/>	●	42.0/42.6 M	
Tuner 20	224.2.2.2	2020	UDP	DATA2	<input checked="" type="checkbox"/>	●	41.3/42.6 M	
Tuner 21	224.2.2.2	2021	UDP	DATA2	<input checked="" type="checkbox"/>	●	36.2/38.0 M	
Tuner 22	224.2.2.22	20022	UDP	DATA2	<input checked="" type="checkbox"/>	●	32.3/38.0 M	
Tuner 23	224.2.2.2	2023	UDP	DATA2	<input type="checkbox"/>	●	36.1/38.0 M	
Tuner 24	224.2.2.2	2024	UDP	DATA2	<input type="checkbox"/>	●	33.5/38.0 M	

The screenshot displays the BLANKOM software interface for monitoring a DVB-Tuner to IP-Out. The top menu bar includes Home, Decoding, TR 101 290, Recording, View, and Teletext. The main interface is divided into several sections:

- Top Panel:** Shows the current mode as MPEG-TS, ATSC 3.0, and TS Standard. It includes controls for ATSC, DVB, ISDB, Freeze, Refresh, and Reset. The input is identified as '2: IP (Local IP: 192.168.1.202)' with an alias and URL 'udp:// 224.2.2.22:20022'.
- PID info (64):** A list of 64 PID streams with their respective names and bit rates. Key entries include:
 - 0 PAT (14.7 kbps / 0.05%)
 - 1 CAT (14.7 kbps / 0.05%)
 - 16 NIT-actual (0 bps / 0.00%)
 - 17 SDT-actual, SDT-other, BAT (8.9 kbps / 0.03%)
 - 18 EITpf, EITs (1.44 Mbps / 4.5%)
 - 20 TDT, TOT (2.9 kbps / 0.01%)
 - 84 PES Private Data (2.9 kbps / 0.01%)
 - 100 PMT (29 kbps / 0.1%)
 - 110 MPEG-2 Video (4.8 Mbps / 14.8%)
 - 120 MPEG-1 Audio (263 kbps / 0.8%)
 - 121 MPEG-1 Audio (199 kbps / 0.6%)
 - 122 MPEG-1 Audio (199 kbps / 0.6%)
 - 125 AC-3 Audio (461 kbps / 1.4%)
 - 130 Teletext Data (301 kbps / 0.9%)
 - 131 PES Private Data (2.9 kbps / 0.01%)
 - 200 PMT (14.7 kbps / 0.05%)
 - 210 MPEG-2 Video (5.5 Mbps / 17.1%)
 - 220 MPEG-1 Audio (263 kbps / 0.8%)
 - 221 MPEG-1 Audio (199 kbps / 0.6%)
 - 222 MPEG-1 Audio (199 kbps / 0.6%)
 - 225 AC-3 Audio (461 kbps / 1.4%)
 - 230 Teletext Data (301 kbps / 0.9%)
 - 231 PES Private Data (4.5 kbps / 0.01%)
 - 250 AIT (10.3 kbps / 0.03%)
 - 300 PMT (14.7 kbps / 0.05%)
 - 310 MPEG-2 Video (4.0 Mbps / 12.4%)
 - 320 MPEG-1 Audio (263 kbps / 0.8%)
 - 321 MPEG-1 Audio (199 kbps / 0.6%)
 - 322 MPEG-1 Audio (199 kbps / 0.6%)
 - 325 AC-3 Audio (460 kbps / 1.4%)
 - 330 Teletext Data (301 kbps / 0.9%)
 - 331 PES Private Data 1 (20 kbps / 0.06%)
 - 350 AIT (8.7 kbps / 0.03%)
 - 410 MPEG-1 Audio (267 kbps / 0.8%)
 - 411 PMT (14.7 kbps / 0.05%)
 - 450 AIT (4.4 kbps / 0.01%)
 - 500 PMT (14.7 kbps / 0.05%)
 - 510 MPEG-1 Audio (136 kbps / 0.4%)
 - 600 PMT (14.7 kbps / 0.05%)
 - 610 MPEG-2 Video (3.8 Mbps / 11.7%)
 - 620 MPEG-1 Audio (263 kbps / 0.8%)
 - 621 MPEG-1 Audio (199 kbps / 0.6%)
 - 622 MPEG-1 Audio (199 kbps / 0.6%)
 - 625 AC-3 Audio (460 kbps / 1.4%)
- Transport stream 1079:** Shows service details for ZDFvision, including:
 - Services (9): ZDF (6.2 Mbps / 19.3%), PES Private Data (2.9 kbps / 0.01%), MPEG-2 Video (4.8 Mbps / 14.8%), MPEG-1 Audio (263 kbps / 0.8%), MPEG-1 Audio (199 kbps / 0.6%), MPEG-1 Audio (199 kbps / 0.6%), AC-3 Audio (461 kbps / 1.4%), Teletext Data (301 kbps / 0.9%), PES Private Data (2.9 kbps / 0.01%), AIT (10.3 kbps / 0.03%).
 - Program: 28006
 - PMT PID: 100
 - PCR PID: 110
 - Provider: ZDFvision
 - Other services: 3sat (6.9 Mbps / 21.5%), KiKA (5.5 Mbps / 17.0%), ZDFinfo (5.2 Mbps / 16.2%), Dif Kultur (740 kbps / 2.3%), Dif (270 kbps / 0.8%), zdf_neo (5.4 Mbps / 16.6%), DRadio DokDeb (136 kbps / 0.4%), Dif Nova (271 kbps / 0.8%).
 - Tables: PAT, CAT, PMT, NIT-actual, BAT, SDT-actual, SDT-other, EIT-actual, TDT, TOT, AIT, EIT-actual, EIT-other.
- Trace bar:** A graph showing bit-rate over time for TR 101 290. The y-axis ranges from 4.0 Mbps to 40.0 Mbps. The graph shows a steady state around 32.0 Mbps with minor fluctuations.

Network Setup:

Network

NMS

IP Address:

Subnet Mask:

Gateway:

Web Manage Port:

MAC Address: 48:d7:ff:02:14:01

DATA1

IP Address:

Subnet Mask:

Gateway:

MAC Address:

DATA2

IP Address:

Subnet Mask:

Gateway:

MAC Address:

We assume that the user is familiar with IP settings and already knows his own system to connect the unit to. If you use the **Output Streaming: We recommend using 2 separate Switches for MNS and Streams!** Attention: The Switch must support IGMP Filtering to not overload the NMS 100 baseT port

At least a 100BaseT for the Management NMS RJ45 port and a second one with Gigabit Ethernet 10/100/1000BaseT with at least Layer 2+ with IGMP V2 features. Otherwise, you might flood your IP-Streaming network with unnecessary Data, which might overload connected IPTV STB's because they almost have only 100BaseT capacity (Never ones use 1GbE ports) but too many inputs into a STB can result in side effects. If you need to select a Switch, we recommend HP Procurve 2530 24G or 48G which are cost effective, easy to configure, can be trunked and supporting IGMP V2. If the switch needs routing functions, the bigger brother of this series might be the right choice.

Because to not accidentally put DATA and NMS port in the same sub-network, the data – port setting does not allow this by default. Usually, the DATA GbE Ports needing at least own and free IP addresses- otherwise the Switch or the receivers (i.e., IPTV STB's) cannot locate the source of the streams.

Note: DATA1 and 2 are handled by the same Network-hardware and is addressed as (Linux users know that):

eth1 and eth1.1

So, they are not fully independent but should work independently. But please assure different IP addresses and avoid network conflicts.

Changing a user-account:

Change it to your needs, but do not forget the password otherwise you would need to reset the unit with the Front-panel RESET switch (If this model has one, press it min. 10...15 sec) to factory default.

ATTENTION: Do not use 'special' characters like @ or % or &... for the username and the password because you will be locked out. These are not accepted by the basic installed character table for it.

Set Date and time as NTP:

Tuner-Setup:

Note: DVB-C / T Tuning is slightly different and you need to enter the center- frequency of the to be received DVB-C/QAM channel. The tuner will detect the inside-channel values.

NOTE: a comma in the frequency like 624,25 MHz has to be entered in AMERICAN STYLE as a “
Instead the “;

So, we do concentrate on Satellite first:

Basics: We recommend to connect every tuner RF Input to the L-Band network by -Using a Multiswitch with more than one SAT-position and > 16 SAT-IF outputs: You can set every single Tuner Input individually.

-Using a SAT-Splitter: Be carefully, *active* splitter needs at least one 13V...18V DC connection to it to operate. You should avoid to switch on V/H polarization Voltage 13/18V on every Input port. The active splitter would pass the 13V or 18V to the Multiswitch and assigning the fixed polarization to the Multiswitch. So, all selected Transponders should be either in Vertical (13V) or Horizontal (18V)

position.

Passive splitters should be used with DC Passthrough and the Voltage should be passed only once as well.

We recommend to check www.lyngsat.com or www.satbeams.org for correct settings.

Example:

<https://www.lyngsat.com/Astra-1KR-1L-1M-1N.html>

LOW-Band =9750 MHz LNB-IF frequency - while

HIGH-band = 10600.000MHz using 22KHz signal

Go to

The screenshot shows the IGS-924 web management interface. The main header is 'IGS-924'. Below it is a navigation menu with 'Web Management'. The left sidebar contains sections: 'Summary' (with 'Status'), 'Parameters' (with 'Tuner', 'TS Config', and 'USB Media'), and 'System' (with 'Network', 'Password', 'Configuration', 'Firmware', and 'Log'). The 'Tuner' option is highlighted. The main content area is titled 'Tuner Configuration' and contains a table with two rows:

#	Tuner
1	DVB-S2X/S2
2	DVB-S2X/S2

So you see preset values for a C-Band:

The screenshot shows a configuration popup for a DVB-S2X/S2 tuner. It displays the following parameters:

- Quality: 0%
- Strength: 0%
- Power: -85.73 dBm
- C/N: 0.00 dB
- BER: 1.0E-09
- Satellite Freq: 3840.000 M
- LNB Freq: 5150.000 M
- Symbolrate: 27500 K

There is a speed indicator showing '0.000 Mbps' and an 'Edit' button with a hand cursor.

You should click on EDIT opens following config popup:

Satellite Frequency: MHz
 LNB Frequency: MHz
 Symbolrate: Ksps
 LNB Voltage: v
 22K: v
 Satellite: (1-4)

**Here you need to enter the data for your Satellite Transponder you want to receive:
 Example ASTRA Satellite (is DiSEqC port A (1) at our Multiswitch): satindex.de - ASTRA**

* DVB-S2, 8PSK, Frequenz 10964 MHz, Polarisation H, Symbolrate 22000, FEC 2/3						Audio Infos Crypt Infos				
Sender (8) / HDTV / Status / Land / Kategorie				SID / Video PID / Audio PID / PCR PID / VT PID / Update						
BILD HD	HD		Germany	Dokus / Reportagen	10101	511	515 deu	511	0	28.07.2021
Channel21 HD	HD		Germany	Shopping	10104	1279	1283 deu	1279	0	30.01.2016
Handystar TV HD	HD		Germany	Shopping	10102	767	771 deu	767	0	05.06.2019
MTV HD	HD	🔒	Germany	Musik	10103	1023	1027 deu	1023	0	02.09.2014
MTV HD Austria	HD	🔒	Austria	Musik	10113	1023	1027 deu	1023	0	01.06.2015
QVC STYLE HD	HD	🔒	Germany	Shopping	10105	1535	1539 deu	1535	37	16.01.2020
TLC HD	HD	🔒	Germany	Allgemein	10100	255	259 deu	255	32	26.02.2018
TLC HD Austria	HD	🔒	Austria	Allgemein	10110	255	259 deu	255	32	26.02.2018

You see 4 of 8 are encrypted and cannot be decrypted by this FTA receiver.:

Entering its values: Transponder Frequency: 10964 , Low band LNB-IF=9750, 22000 KS/s, 18 V = Horizontal, 22KHz High band switching = OFF because we are in low Band (border is 11700 MHz)

CH 1 Config ✕


Satellite Frequency: MHz
 LNB Frequency: MHz
 Symbolrate: Ksps
 LNB Voltage: v
 22K: v
 Satellite: (1-4)

Please be patient, the tuners need to swing into it and it takes a moment until the web-IF shows


the reception (or not):

Tuner Configuration					
#	Tuner	TS Lock	Signal	Parameters	Action
1	DVB-S2X/S2	41.008 Mbps	Quality: 55% Strength: 65% Power: -34.86 dBm C/N: 13.75 dB BER: 0.0E+00	Satellite Freq: 10964.000 M LNB Freq: 9750.000 M Symbolrate: 22000 K	Edit

You are getting some values but do not be irritated because the real reception quality from the Multiswitch directly measured is shown here:

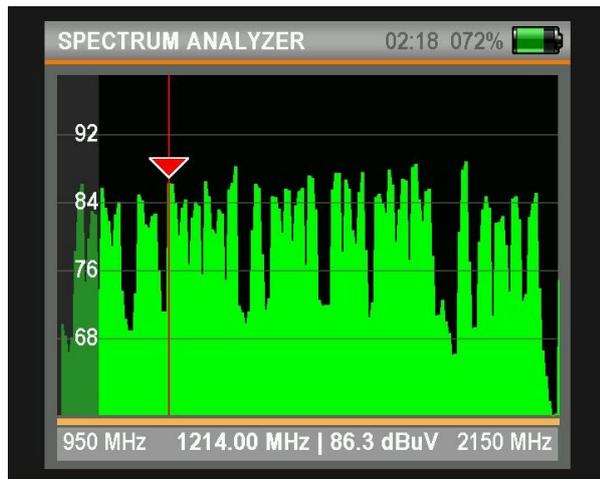

And the IGS-tuner shows lower values:

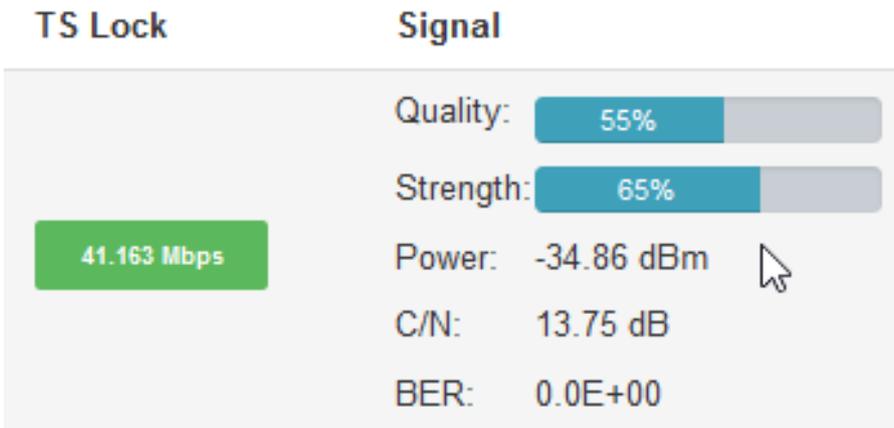

because it is not a real

measurement instrument – just showing good or weak is reliable.

If you face CC errors or disturbed pictures at TV IP receiver side it might be because the INPUT SIGNAL is too WEAK, so you should amplify the COAX SAT Inputs. This is the case with long coax-cables which cause attenuation every meter by meter.

Anyway, repeat these tuner configurations for every of the to be used inputs of the machine:

#	Tuner	T S Lock	Signal	Parameters	Action
1	DVB-S2X/S2	OK 100 Mbps	Quality: 52% Strength: 82% Power: -34.86 dBm C/N: 13.75 dB BER: 0.0E+00	Satellite Freq: 10964.000 M LNB Freq: 9750.000 M Symbolrate: 22000 K	Edit
2	DVB-S2X/S2	OK 100 Mbps	Quality: 57% Strength: 87% Power: -32.69 dBm C/N: 13.25 dB BER: 0.0E+00	Satellite Freq: 11063.000 M LNB Freq: 9750.000 M Symbolrate: 22000 K	Edit
3	DVB-S2X/S2	OK 100 Mbps	Quality: 57% Strength: 72% Power: -27.03 dBm C/N: 14.25 dB BER: 0.0E+00	Satellite Freq: 12110.000 M LNB Freq: 10500.000 M Symbolrate: 27500 K	Edit
4	DVB-S2X/S2	OK 100 Mbps	Quality: 51% Strength: 85% Power: -34.86 dBm C/N: 12.75 dB BER: 0.0E+00	Satellite Freq: 10775.000 M LNB Freq: 9750.000 M Symbolrate: 29000 K	Edit
5	DVB-S2X/S2	OK 117 Mbps	Quality: 53% Strength: 82% Power: -36.60 dBm C/N: 13.25 dB BER: 0.0E+00	Satellite Freq: 10891.000 M LNB Freq: 9750.000 M Symbolrate: 22000 K	Edit
6	DVB-S2X/S2	OK 100 Mbps	Quality: 52% Strength: 72% Power: -34.86 dBm C/N: 13.25 dB BER: 0.0E+00	Satellite Freq: 12130.000 M LNB Freq: 10500.000 M Symbolrate: 27500 K	Edit
7	DVB-S2X/S2	OK 100 Mbps	Quality: 57% Strength: 75% Power: -34.86 dBm C/N: 14.25 dB BER: 0.0E+00	Satellite Freq: 12110.000 M LNB Freq: 10500.000 M Symbolrate: 27500 K	Edit


...

DVB-C or -T (ATSC/ISDB-Tb) Tuning:

Of course, you need the proper DVB-tuner installed instead of SAT. Select your RF-Mode:

Then we enter the known parameter: Modulation here DVB-C-J83A/C, Centre Freq.: 650MHz (unusual=no CENELEC-Channel-Plan), 6850 SR, 256QAM constellation, assure the proper dBm (dBµV) Input values in the

Coax-cable...




Tuner	Quality	Strength	C/N	Power	BER	Symbolrate	Freq	Action
1 DVB-C(J.83 A/C)	99%	84%	36.00 dB	-15.50 dBm	0.00e+00	8.586 Mbps	650.000MHz	Edit

NOTE: USA/Corea are using DVB-C AnnexB (J83B) but the rest of the world **DVB-C (J83 A/C)**.


That's important for the tuner setting: Frequency bandwidth and Symbol Rates! Know your mode!

Example here with only one TV Service from our encoder Modulator:


Parse the input to get the content information:

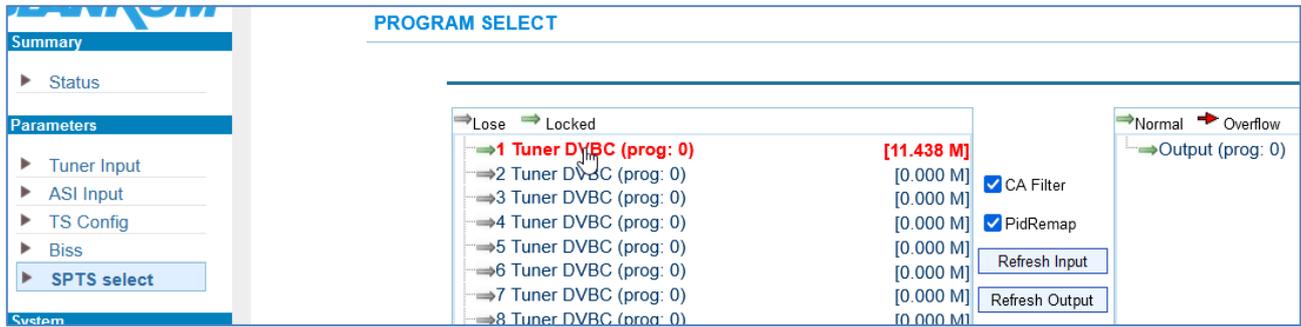



Switch off PID-remap and CA filter if your Input RF does not contain encrypted channel PIDs and does not overlap in PID-numbers with other to be received RF Channels in DVB-C/T/T2 or ISDB-Tb or ...

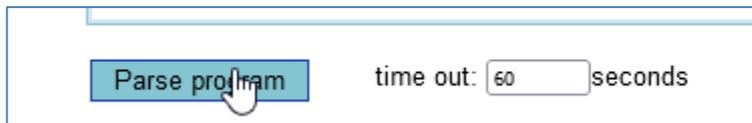

Select and stream it right:

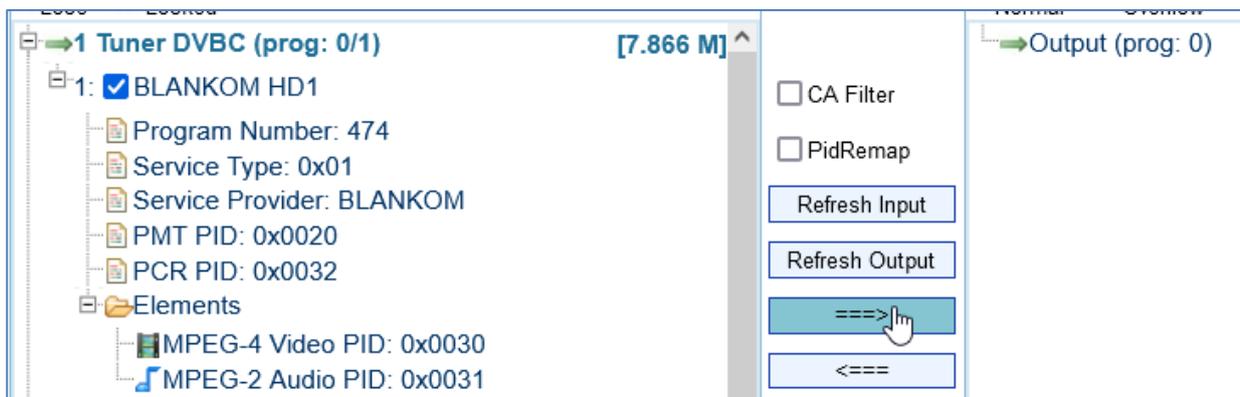

Click on that

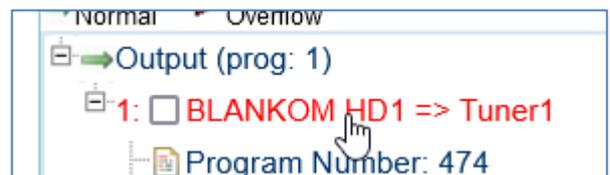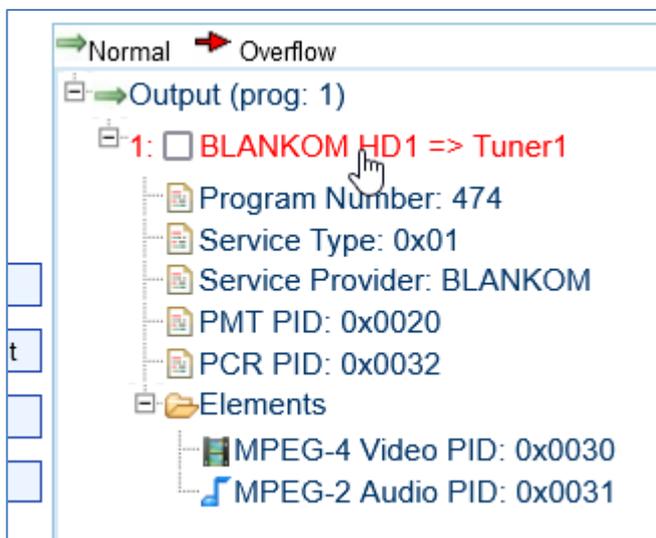

and you can modify what you like: click on the passed service opens a popup:

We recommend not to use same MultiCast-IP Addresses but also different ones and so the ports as well:

Bad example for GBE1+2:

not recommended

Note: The both GbE outputs are some kind of mirrors and are not independent from each other. Note Samsung Hospitality TV's like to start with 225.x.x.x instead of 224.x.x.x!

So 225.0.0.1:10001 ... 225.0.0.2:10002 ... is a good idea. **Rem.:** If using RTP, please make sure the ports are numbered EVEN and >5000 e.g.: 225.1.1.1:5002, 225.1.1.2:5004, 225.1.1.3:5006, ...

Of course you can have other inputs like ASI to demultiplex and stream to UDP Multicast. Be sure you are able to switchn ON your IGMP-management in your GbE Switches to not flood the network with Multicast's!!!

ASI-INPUT(s): (IGS-924 has one only):

As soon as you connect the ASI IN-Ports:



Now we have configured SAT Inputs and like to stream selected Services to IP out:


SPTS output Settings:

CA Filter and PID-Remap are ON by default.



CA-Filter: If you do not need to filter decrypted unnecessary EMM/ECM PIDs from the Input Streams, please uncheck them.

PID Remapping isn't almost necessary for SPTS streaming. In MPTS mode it can avoid overlapping PID-Re-Multiplex problems. DVB-professionals know that ...


With DATA 1 and 2 you can select which GbE port you want to stream the in- to the output interfaces:

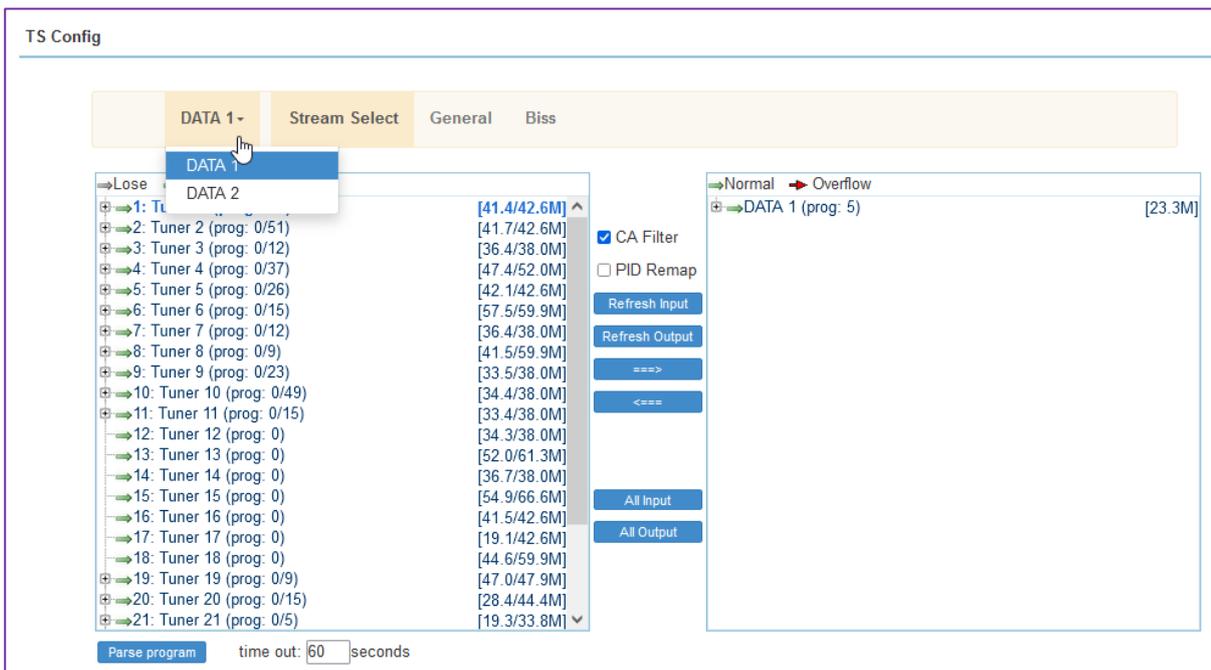


You can set the character encodings of the Transponder Text (note: äöüß are germans) so switch it if they are shown wrong:

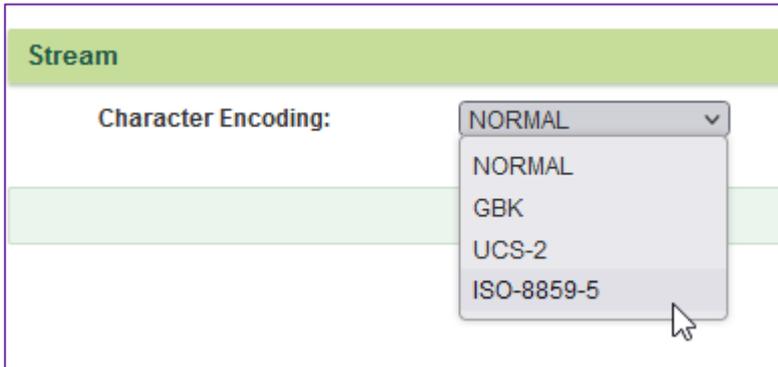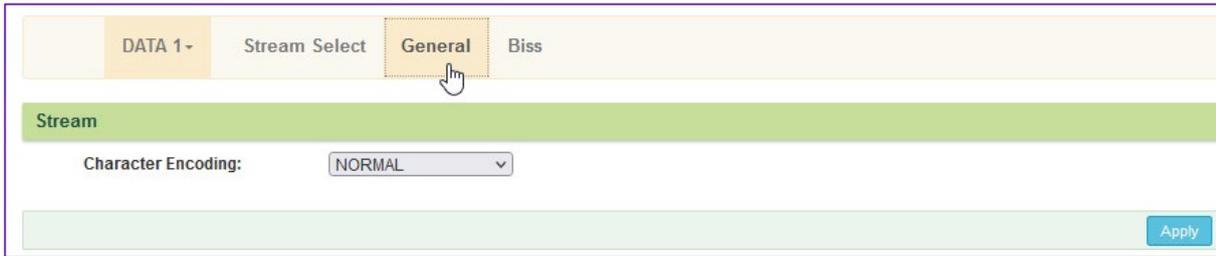


BISS embedded decryption needs known keys and the select mode:

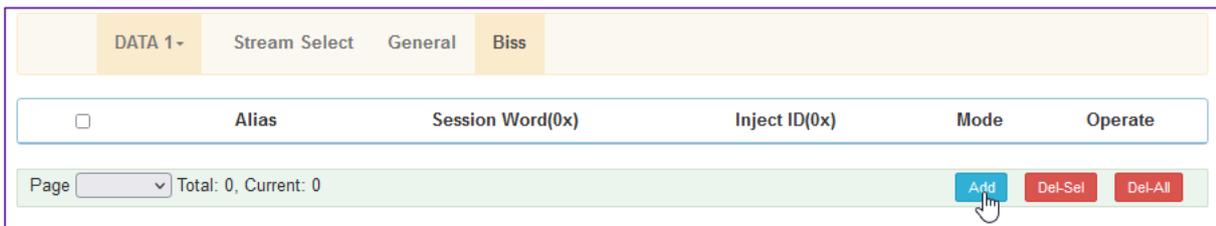


Popup:

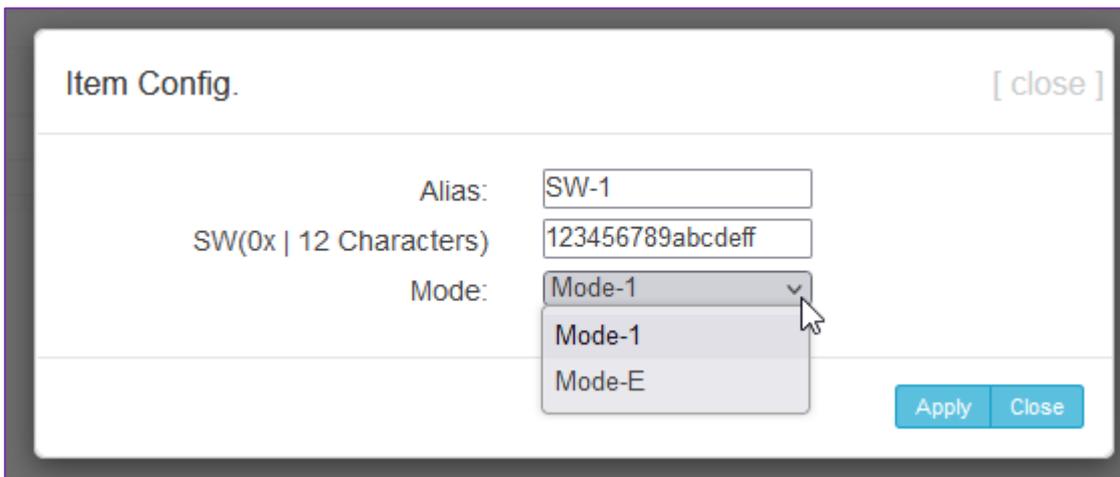


The key can later than be selected in the stream – popup:

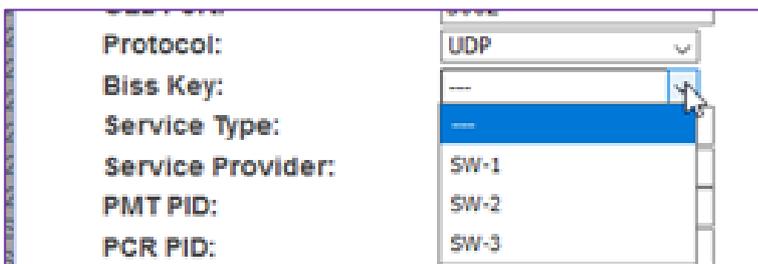


Back to the Input TS from every tuner:

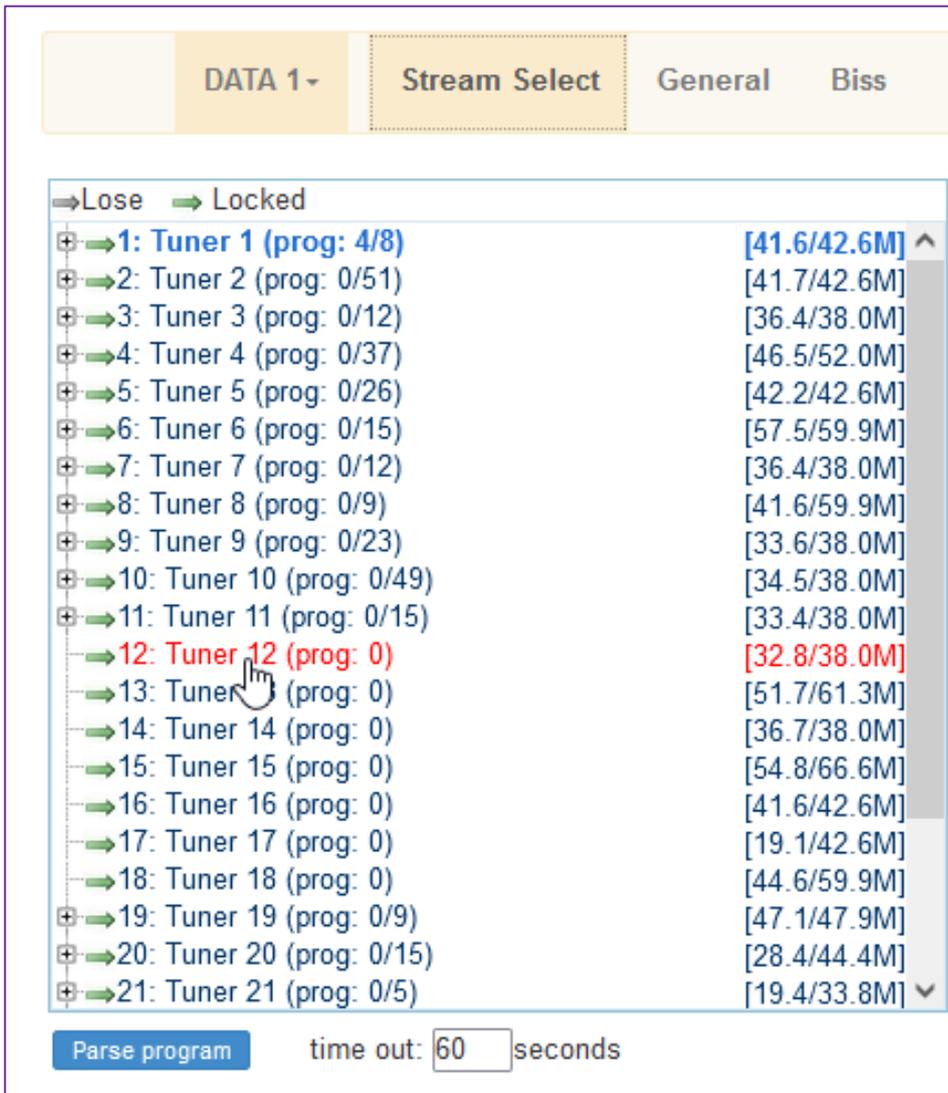


You need to parse every single Input content by selecting the Input (Tuner/ASI) and PARSE it so the machine detects every single TV/Radio Service from the Inputs select it (red) and PARSE PROGRAM:

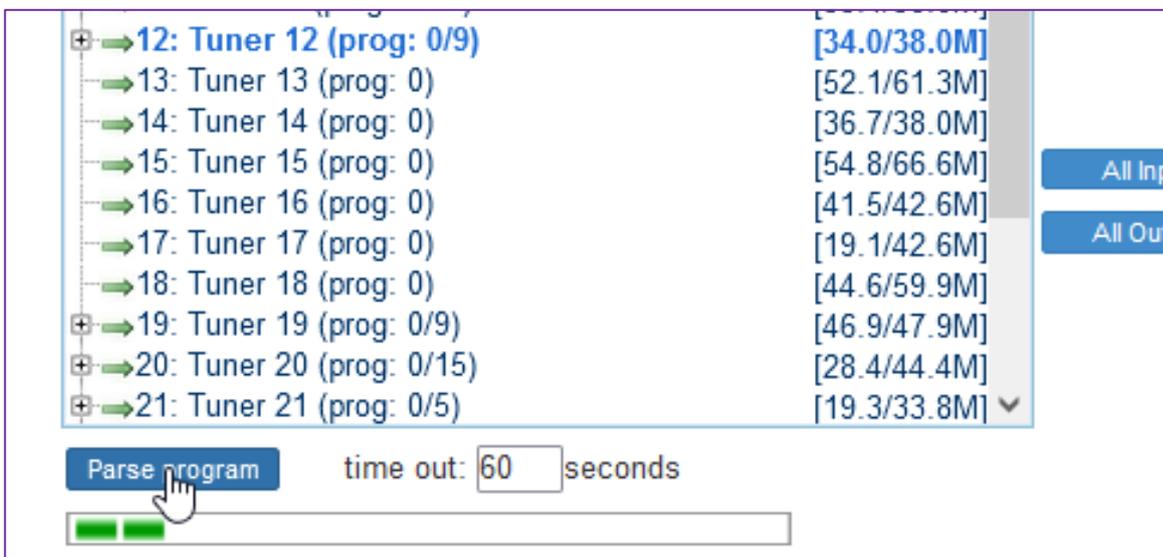

You will see the number of detected programs: Open the '+':

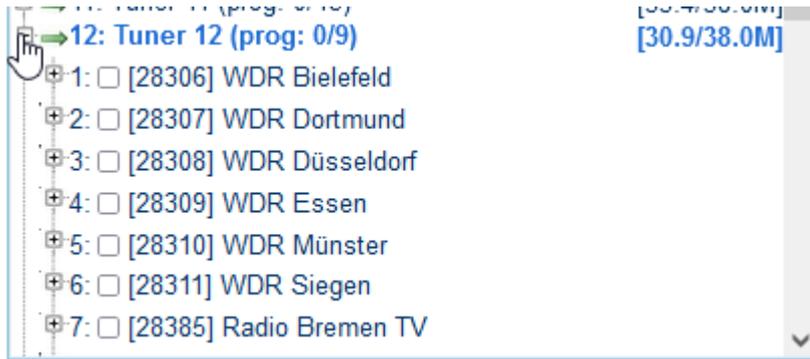


Then select the services you want to stream and PUSH them to the right:

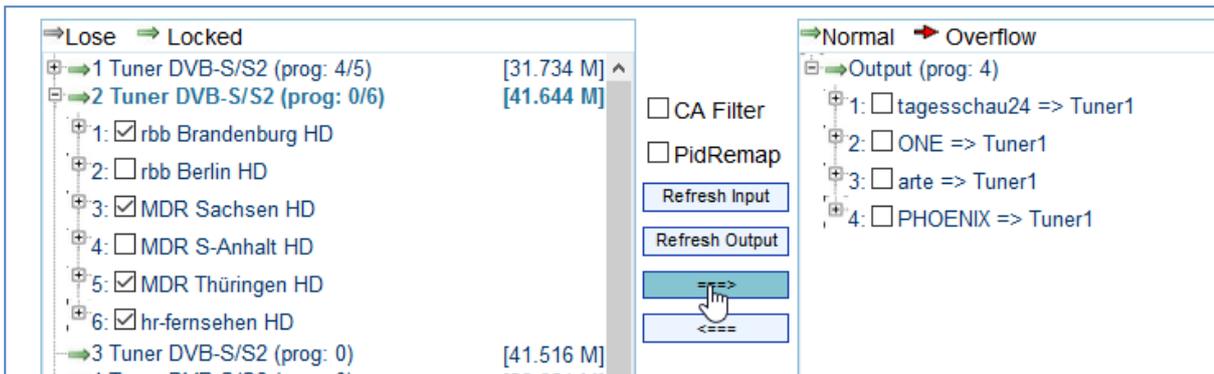


see the content and more info on the right side by open it.

with the '+' you see the details:

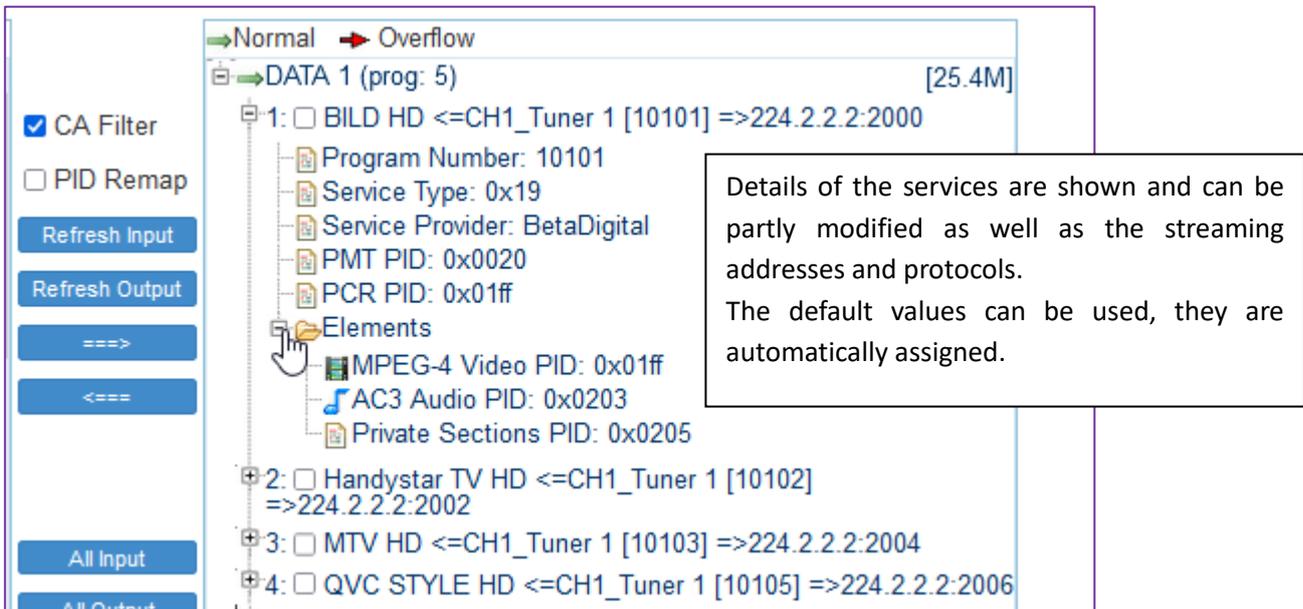

proceed with all Inputs on the left: PARSE first than selecting the services and push them to the right to generate your favorite Streams...


Finally, you'll get an overview how many you have selected from which input left to the outputs right:

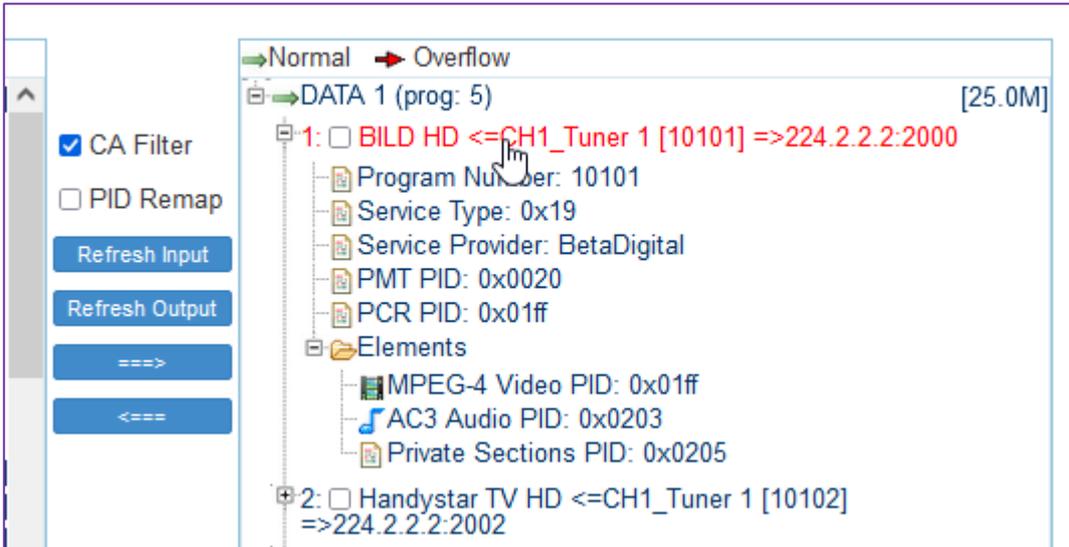

Now it's time to configure your


Stream output settings in SPTS:

by selecting the output service

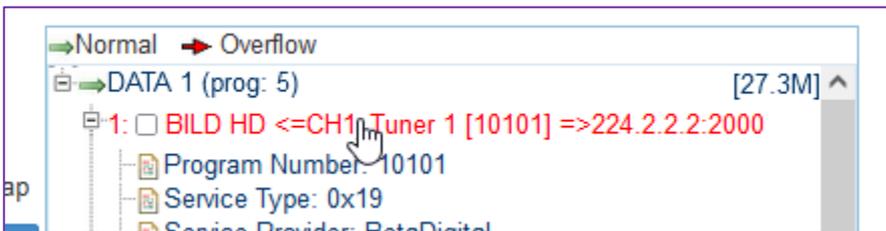

click

a popup will follow:

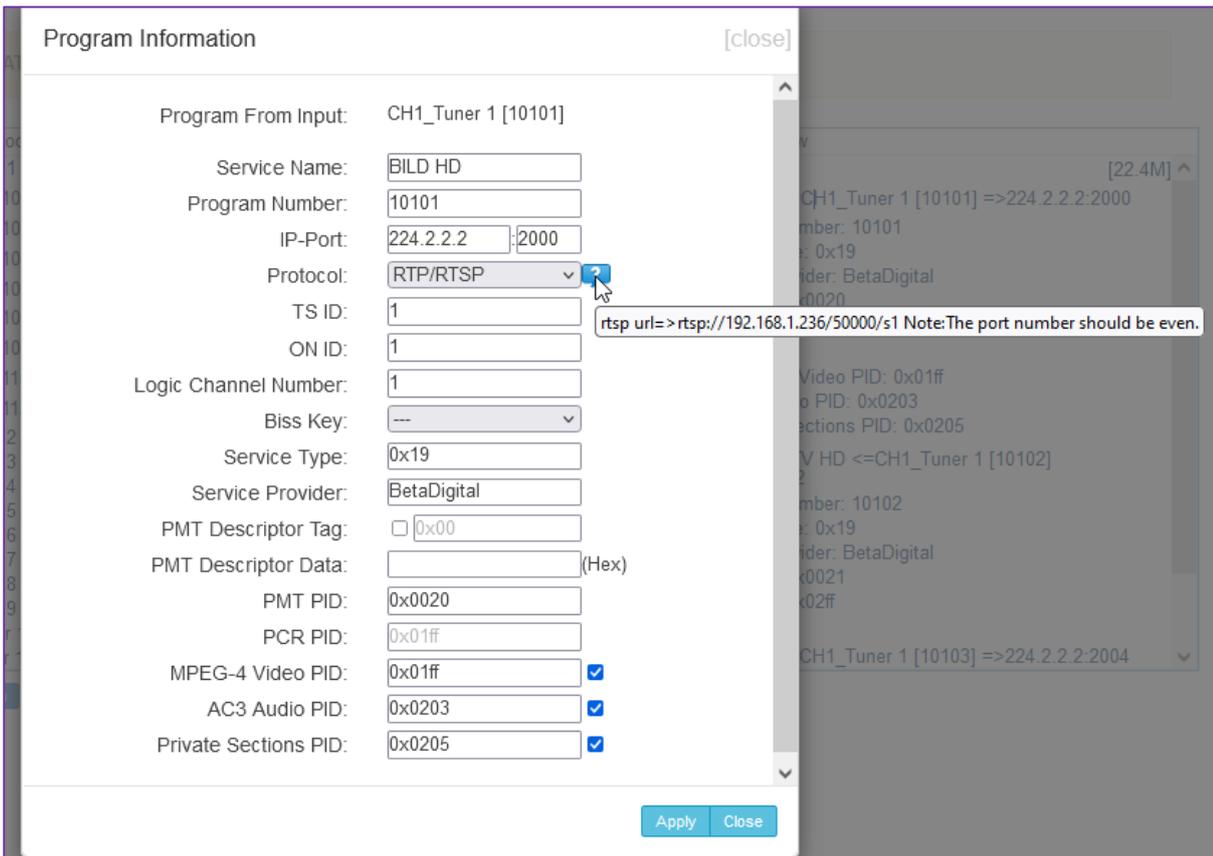

Program From Input:	CH1_Tuner 1 [10101]	
Service Name:	BILD HD	
Program Number:	10101	
IP-Port:	224.2.2.2	:2000
Protocol:	RTP/RTSP ?	
TS ID:	UDP	
ON ID:	RTP/RTSP	
Logic Channel Number:	1	
Biss Key:	---	
Service Type:	0x19	

you can edit most of them...

If you change to RTP / RTSP streaming, a '?' appears. This one gives a hint how to address the Reception of the RTSP-ULR in your Unicast receiver.

If you do not see this, enable popups in your browser (here firefox 😊) settings:

<input type="checkbox"/> Pop-up-Fenster blockieren	<div style="border: 1px solid gray; padding: 5px;"> <p style="background-color: yellow; display: inline-block; font-size: small;">popup</p> Ausnahmen... <hr/> Ausnahmen... </div>
<input checked="" type="checkbox"/> Warnen, wenn Websites versuchen, Add-ons zu installieren	

Then it shows the hint:

By mouseover:

IP-Port:	224.2.2.2	:2000	mber: 10101 : 0x19 nder: BetaDigital Note: The port number should be even.
Protocol:	RTP/RTSP	?	
TS ID:	1		
ON ID:	1		

Proceed with all of them, filter unwanted PIDs, I hope you know what you are doing ...

SAVE and go.

Check RTP-stream Multicast: (RTP-streams from the specification: use even port numbers because it sends a CRC – Info 2nd stream on PORT +1 – so avoid using that by another stream- and they recommend to use Ports above 5000)



Check RTSP:

The **RTSP-streams** can be unicast received from DATA1 out or DATA2 out:

rtsp://GE_ip:50000/sx

DATA1: x is 0...511(SPTS), 0...11(MPTS);


DATA2: x is 512...1023(SPTS), 12...23(MPTS).

while in MPTS mode


The single streams are /0 ... /511 only, but consider which output you have directed them to.

Or in some models the stream starts counting from 1 instead of '0'.


The popup shows the right RTSP config.

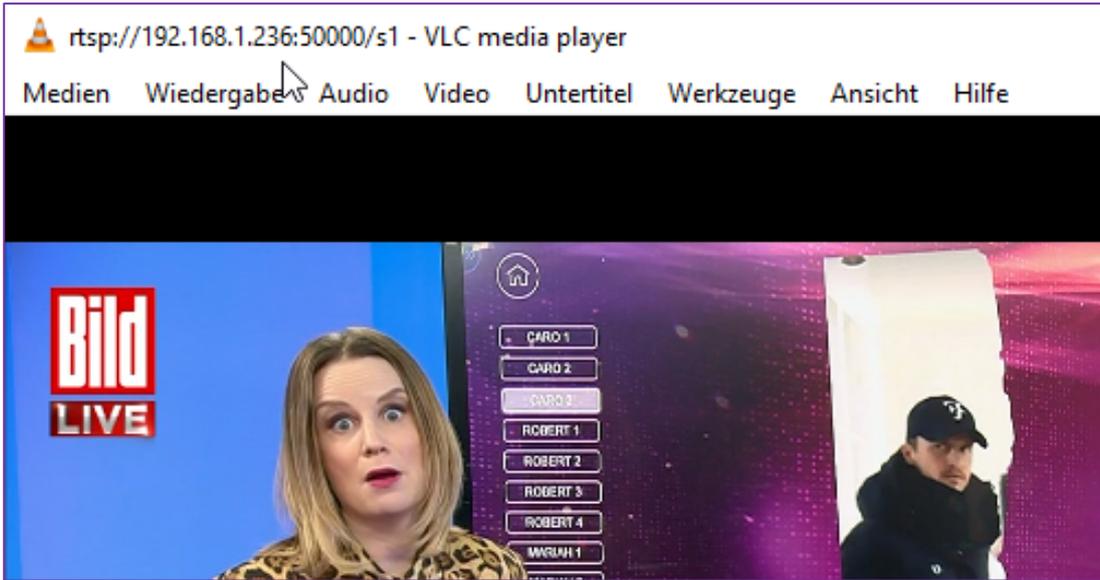

Now it is Time to SAFE yourself before your kid is cutting the power source accidentally:

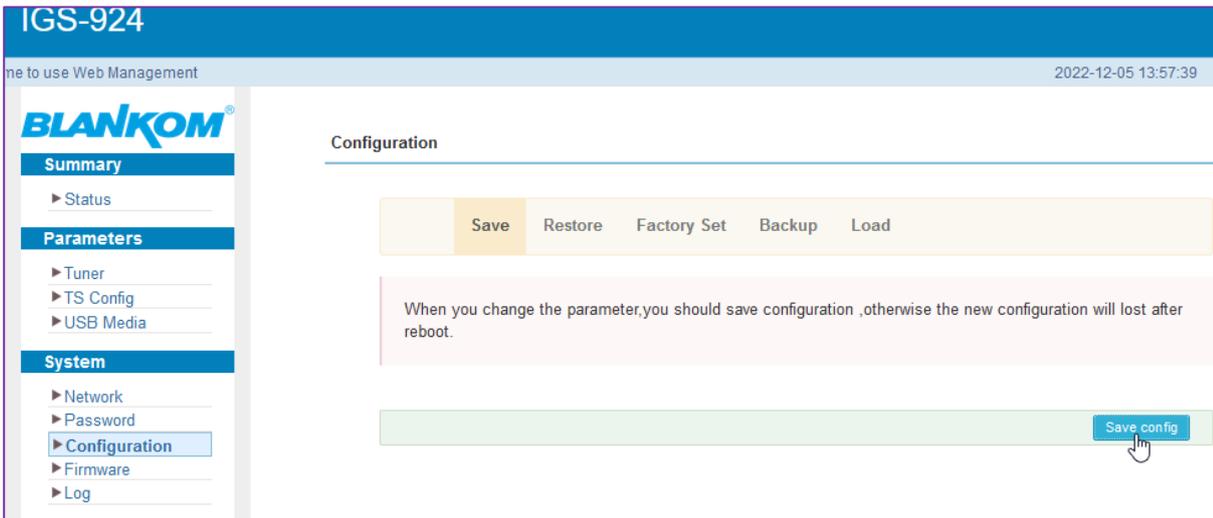


And maybe locally:

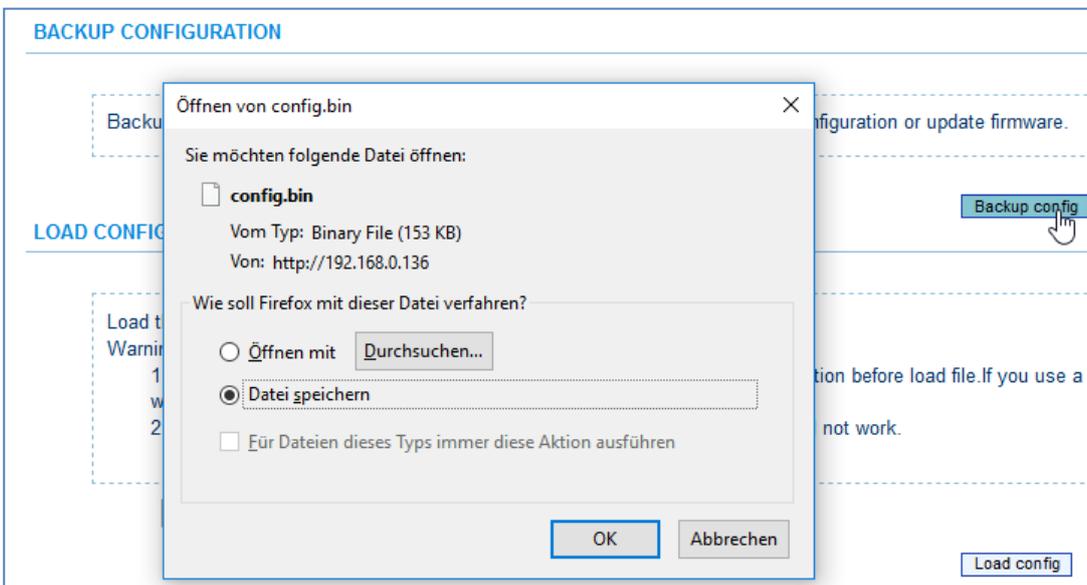


Playback Info-Channel from USB-PEN:


Need to be formatted as FAT32 (or different ... check what's supported):

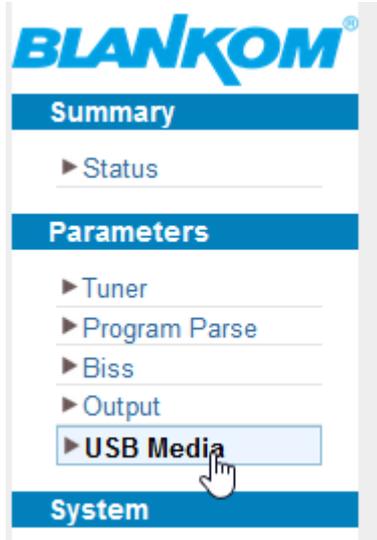

USB inserted here with one TS file:

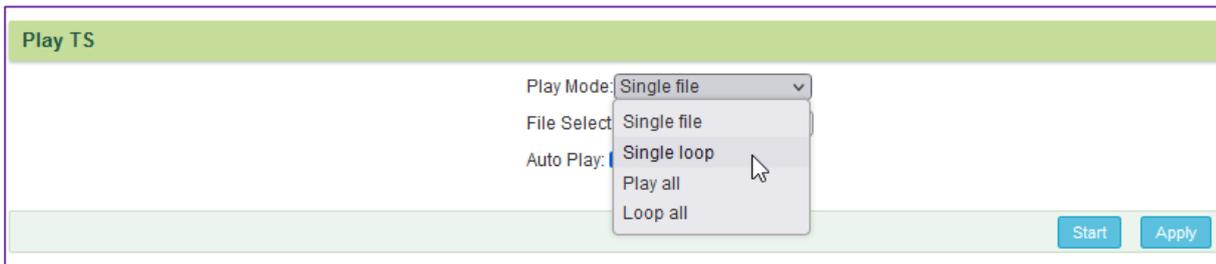

Self-explaining:

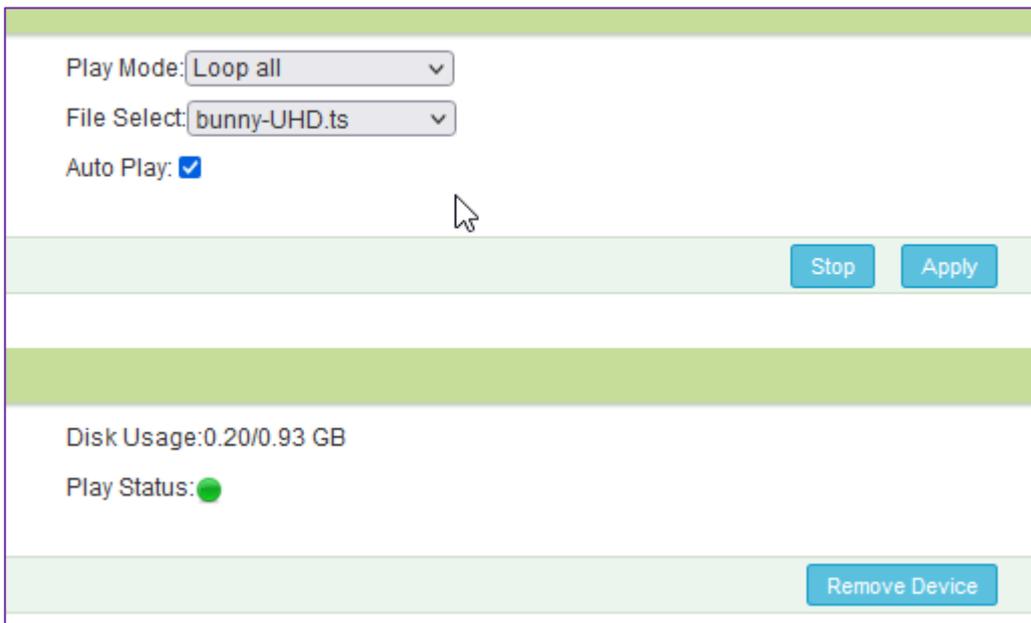

Stream:

It's the 26th output:

Tuner 24	224.2.2.2	2024	UDP	DATA2	<input type="checkbox"/>	●	0.0/0.0 M	
ASI 25	224.2.2.2	2025	UDP	DATA1	<input type="checkbox"/>	●	0.0/0.0 M	
USB 26	224.2.2.2	2026	UDP	DATA1	<input checked="" type="checkbox"/>	●	10.3/25.2 M	

Channel 26 Config. [close]

Enable:

IP Address:

Port:

Protocol: UDP

Null PKT Filter:

DATA:
 DATA1
 DATA1
 DATA2

Apply
Close

Can be VBR or with zeros:

MPEG-TS
 ATSC
 DVB
 Refresh
 Freeze
 ISDB
 Reset

2: IP (Local IP: 192.168.1.202)
Alias
URL
udp://
224.2.2.2:2026

Input Adapter

PID info (7):

- 0 PAT (14.0 kbps / 0.1%)
 - 17 SDT-actual (2.7 kbps / 0.03%)
 - Bitrate: 2.738 bps / 0.03%
 - PCR: No
 - Scrambled: No
 - CC Errors: 6
 - Type: SDT-actual
 - 50 SCTE-35 (0 bps / 0.00%)
 - Bitrate: 0 bps / 0.00%
 - PCR: No
 - Scrambled: No
 - CC Errors: 0
 - Type: SCTE-35
 - 263 13818-6 type C (0 bps / 0.00%)
 - Bitrate: 0 bps / 0.00%
 - PCR: No
 - Scrambled: No
 - CC Errors: 0
 - Type: 13818-6 type C
 - 480 PMT (14.0 kbps / 0.1%)
 - Bitrate: 13.956 bps / 0.1%
 - PCR: No
 - Scrambled: No
 - CC Errors: 1
 - Type: PMT
 - 481 AVC/H.264 Video (8.4 Mbps / 89.4%)
 - Bitrate: 8.401.038 bps / 89.4%
 - ES Info
 - PCR: Yes
 - Scrambled: No
 - CC Errors: 2
 - Type: AVC/H.264 Video
 - Stream ID: 224
 - 482 AAC Audio (178 kbps / 1.9%)
 - Bitrate: 178.681 bps / 1.9%
 - ES Info
 - PCR: No
 - Scrambled: No
 - CC Errors: 1
 - Type: AAC Audio
 - Stream ID: 192


Transport stream 101:

- Services (1)
 - Infokanal (8.6 Mbps / 91.3%)
 - 481 AVC/H.264 Video (8.4 Mbps / 89.4%)
 - Program: 1
 - PMT PID: 480
 - PCR PID: 481
 - Provider: Teletrend AG
 - 482 AAC Audio (178 kbps / 1.9%)
 - Program: 1
 - PMT PID: 480
 - PCR PID: 481
 - Provider: Teletrend AG
- Tables
 - PAT
 - Table ID: 0
 - Table PID: 0
 - Table version: 6
 - Repetition rate: 9.3Hz
 - Table interval: 0.11s
 - Number of sections: 1
 - Section length: 16 bytes
 - Transport stream ID: 101
 - Program: 1 (Infokanal)
 - PMT PID: 480
 - PMT
 - Program: 1 (Infokanal)
 - Table ID: 2
 - PCR PID: 481
 - No program-info descriptors
 - PID: 481
 - PID: 482
 - SDT-actual
 - Transport-Stream ID: 101 (onw=65281)
 - Table ID: 66
 - Transport-Stream ID: 101
 - Original Network ID: 65281
 - Service: 1 (Infokanal)
 - EIT schedule: 0
 - EIT present/following: 0
 - Running status: 4 (Running)
 - Free CA mode: 0 (not scrambled)
 - Service Descriptor
 - Descriptor tag: 0x48
 - Service type: 1 (Digital television)
 - Service provider: Teletrend AG
 - Service name: Infokanal

Trace bar

Bit-rate TR 101 290

VLC check:

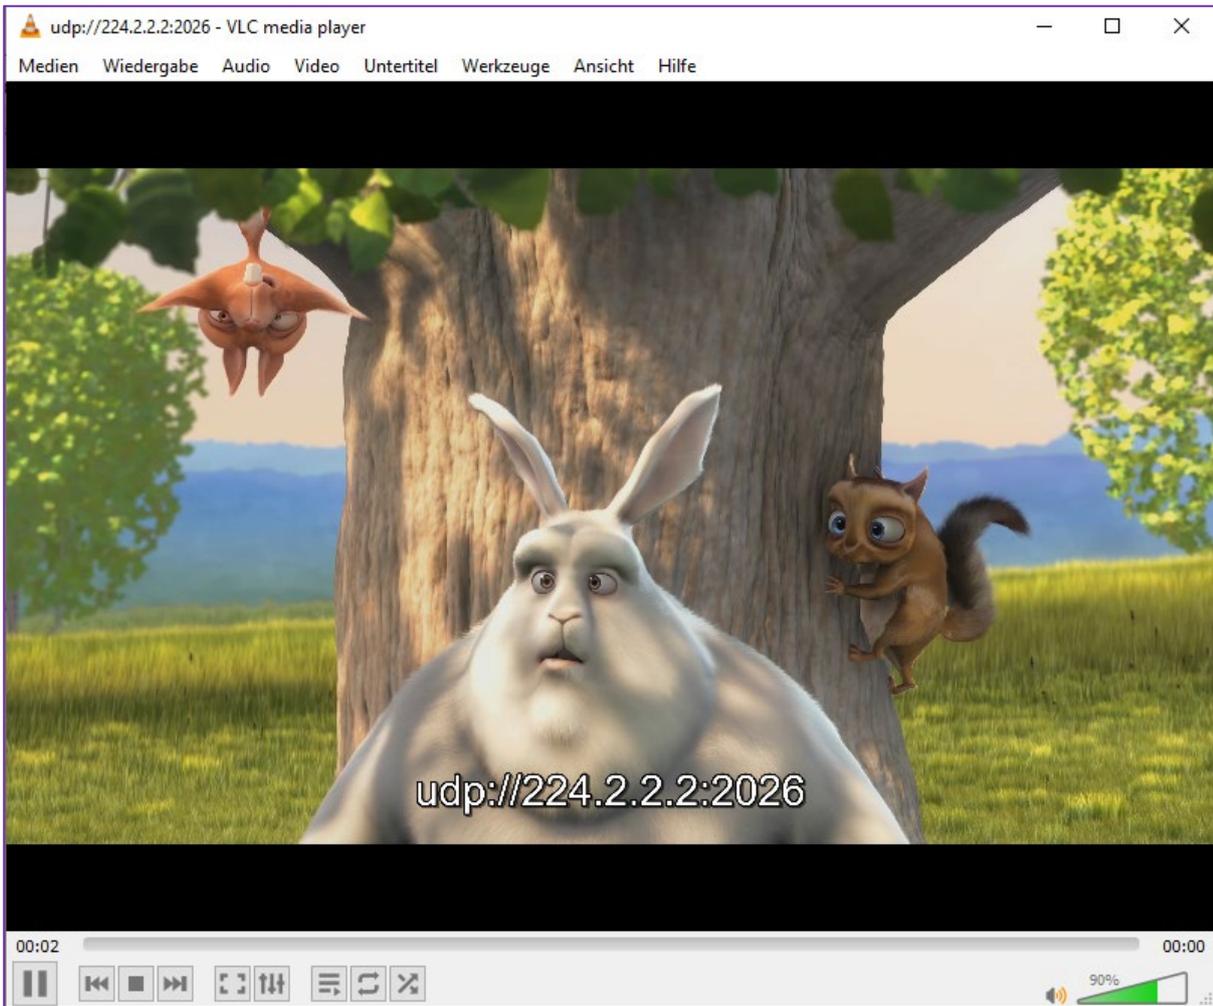

Aktuelle Medieninformationen

Allgemein Metadaten Codec Statistiken

Informationen über den Aufbau des Mediums oder des Streams, Muxers, Audio- und Videocodecs, Untertitel werden angezeigt

- ▼ Stream 0
 - Originale ID: 481
 - Codec: H264 - MPEG-4 AVC (part 10) (h264)
 - Typ: Video
 - Videoauflösung: 3840x2160
 - Pufferabmessungen: 3840x2160
 - Bildwiederholrate: 30
 - Decodiertes Format:
 - Ausrichtung: Oben links
 - Farbsättigungslage: Links
- ▼ Stream 1
 - Originale ID: 482
 - Codec: ADTS
 - Typ: Audio
 - Kanäle: Stereo
 - Abtastrate: 48000 Hz
 - Bits pro Sample: 32
- ▼ Infokanal [Programm 1]
 - Status: Running
 - Typ: Digital television service
 - Herausgeber: Teletrend AG

The USB-PEN TS Infochannel streams can also be pushed to ASI-Out:

ASI Config

Output Channel: Tuner 1
 ASI Out Mode:

Stream

Channel Info.(Alarm/Active/Total): 0/26/26

#	IP Address	Port	Protocol	Unit
Tuner 1	224.2.2.2	2001	UDP	
Tuner 2	224.2.2.2	2002	UDP	
Tuner 3	224.2.2.2	2003	UDP	
Tuner 4	224.2.2.2	2004	UDP	
Tuner 5	224.2.2.2	2005	UDP	
Tuner 6	224.2.2.2	2006	UDP	
Tuner 7	224.2.2.2	2007	UDP	
Tuner 8	224.2.2.2	2008	UDP	

Dropdown menu options: Tuner 1, Tuner 8, Tuner 9, Tuner 10, Tuner 11, Tuner 12, Tuner 13, Tuner 14, Tuner 15, Tuner 16, Tuner 17, Tuner 18, Tuner 19, Tuner 20, Tuner 21, Tuner 22, Tuner 23, Tuner 24, ASI, USB

Software Updates:

Example from its little brother IGS-900 with 16 tuner but its nearly identically:

IRENIS GmbH does not publish Soft- and Firmware-upgrades online. If you face some problems, please send us a bug-report along with all necessary data of the device(s). Nevertheless, here how it works for this unit: The update files are 3. Almost packed as rar-files, so first you'll need to unzip them. Windows inbuilt zip function might not work, but you can try the freeware 7zip which works with rar-files:

1. enter the WEB GUI-->Firmware-Menu, update, maybe a good idea to save your config locally first:

Summary

- ▶ Status

Parameters

- ▶ Tuner Input
- ▶ ASI Input
- ▶ TS Config
- ▶ Biss
- ▶ SPTS select

System

- ▶ Network
- ▶ Password
- ▶ Save | Restore
- ▶ Backup | Load
- ▶ Firmware

SAVE CONFIGURATION

When you change the parameter, you should save configuration, otherwise the new configuration will be lost after reboot.

RESTORE CONFIGURATION

Load latest saved configuration, after click the "Restore" then please click the "Save config" button, otherwise the "Restore" parameter will be lost after reboot.

FACTORY SET

Set all configuration back to default, after click the "Factory Set" then please click the "Save config" button, otherwise the default parameter will be lost after reboot.

+ safe to file:

Summary

- ▶ Status

Parameters

- ▶ Tuner Input
- ▶ ASI Input
- ▶ TS Config
- ▶ Biss
- ▶ SPTS select

System

- ▶ Network
- ▶ Password
- ▶ Save | Restore
- ▶ Backup | Load
- ▶ Firmware

BACKUP CONFIGURATION

Backup current configuration to the local file, we suggest do this before set the configuration or update firmware.

LOAD CONFIGURATION

Load the backup file to restore your configuration.

Warning:

1. New configuration will replace the old one, please backup current configuration before load file. If you use a wrong file, the device may not work.
2. Please do not turn off the power while file loading, otherwise the device will not work.

Datei auswählen Keine ausgewählt

Then update IGS-900_Base_System_Firmware_encr_v01.01.02.07.pkg first:

Name

- IGS-900_16xTuner_IP_cpu_SPTS_v1.21_MPTS_v2.22_20180726.bin
- IGS-900_16xTuner_IP_fpga_SPTSv1.50_MPTSv2.30_20171031.fpga
- IGS-900_Base_System_Firmware_encr_v01.01.02.07.pkg**

FIRMWARE

Warning:

1. Update firmware(software and hardware) to get new function,please choose the right firmware to update.If you use a wrong file,the device may not work.
2. Update will keep a long time,please do not turn off the power, otherwise the device will not work.
3. After update,you must reboot device manually.

Work Mode:

Current Software Version: 1.03 Build 100 Jun 12 2017

Current Hardware Version: 1.10

IGS-900_B...2.07.pkg

Update System Now?

Work Mode:

Current Software Version: 1.03 Build 100 Jun 12 2017

Current Hardware Version: 1.10

IGS-900_B...2.07.pkg

Status: erase flash...

Status: update success,please manual reboot the device.

BLANKOM®

Summary

- ▶ Status

Parameters

- ▶ Tuner Input
- ▶ ASI Input
- ▶ Bliss
- ▶ Program Parse
- ▶ IP Stream

System

- ▶ Network
- ▶ Date | Time
- ▶ Password
- ▶ Save | Restore
- ▶ Backup | Load
- ▶ **Firmware**

FIRMWARE

Warning:

1. Update firmware(software and hardware) to get new function,please choose the right firmware to update.If you use a wrong file,the device may not work.
2. Update will keep a long time,please do not turn off the power, otherwise the device will not work.
3. After update,you must reboot device manually.

Work Mode:

Status: switch success,please manual reboot the device.

Current Software Version: 2.55 Build 200 Oct 29 2021

Current Hardware Version: 2.b0

IGS_900_16Tuner_IP_cpu_SPTS_v1.58_MPTS_v2.56_20220223.bin

Status: update success,please manual reboot the device.

2. Power off and on.
3. Default IP is 192.168.0.136, enter WEB GUI

System	
Software Version:	01.01.02.07
Hardware Version:	check cpu failed.please update CPU program.
Web Version:	1.00
System Version:	check web failed.please update CPU program
Product ID:	0 Day(s)-00:01:55
Uptime:	1.00 Build 100 Feb 21 2017

-->Firmware - Menu,

update IGS-900_16xTuner_IP_cpu_SPTS_v1.21_MPTS_v2.22_20180726.bin

- IGS-900_16xTuner_IP_cpu_SPTS_v1.21_MPTS_v2.22_20180726.bin
- IGS-900_16xTuner_IP_fpga_SPTSv1.50_MPTSv2.30_20171031.fpga
- IGS-900_Base_System_Firmware_encr_v01.01.02.07.pkg

Software Version:	01.01.02.07
Hardware Version:	check fpga failed.please update FPGA program
Web Version:	1.00
System Version:	
Product ID:	0 Day(s)-00:00:21
Uptime:	1.00 Build 100 Feb 21 2017

and IGS-900_16xTuner_IP_fpga_SPTSv1.50_MPTSv2.30_20171031.fpga.

- IGS-900_16xTuner_IP_cpu_SPTS_v1.21_MPTS_v2.22_20180726.bin
- IGS-900_16xTuner_IP_fpga_SPTSv1.50_MPTSv2.30_20171031.fpga
- IGS-900_Base_System_Firmware_encr_v01.01.02.07.pkg

Update FPGA Now?



Status: update success,please manual reboot the device.

4. Power off and on again. Finished:


DEVICE INFORMATION															
<ul style="list-style-type: none"> ▶ Status Parameters ▶ Tuner Input ▶ ASI Input ▶ TS Config ▶ Biss ▶ SPTS select System 	<table border="1"> <thead> <tr> <th colspan="2">System</th> </tr> </thead> <tbody> <tr> <td>Software Version:</td> <td>1.21 Build 100 Jul 26 2018</td> </tr> <tr> <td>Hardware Version:</td> <td>1.50</td> </tr> <tr> <td>Web Version:</td> <td>1.00</td> </tr> <tr> <td>System Version:</td> <td>01.01.02.07(EN)</td> </tr> <tr> <td>Product ID:</td> <td>03508216-20000012-00000000-00000000</td> </tr> <tr> <td>Uptime:</td> <td>0 Day(s)-00:00:40</td> </tr> </tbody> </table>	System		Software Version:	1.21 Build 100 Jul 26 2018	Hardware Version:	1.50	Web Version:	1.00	System Version:	01.01.02.07(EN)	Product ID:	03508216-20000012-00000000-00000000	Uptime:	0 Day(s)-00:00:40
System															
Software Version:	1.21 Build 100 Jul 26 2018														
Hardware Version:	1.50														
Web Version:	1.00														
System Version:	01.01.02.07(EN)														
Product ID:	03508216-20000012-00000000-00000000														
Uptime:	0 Day(s)-00:00:40														

Don't be confused, 'Hardware-Version' shows actual FPGA –Software version.

5. Default IP is still 192.168.0.136.

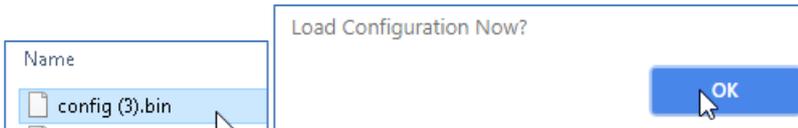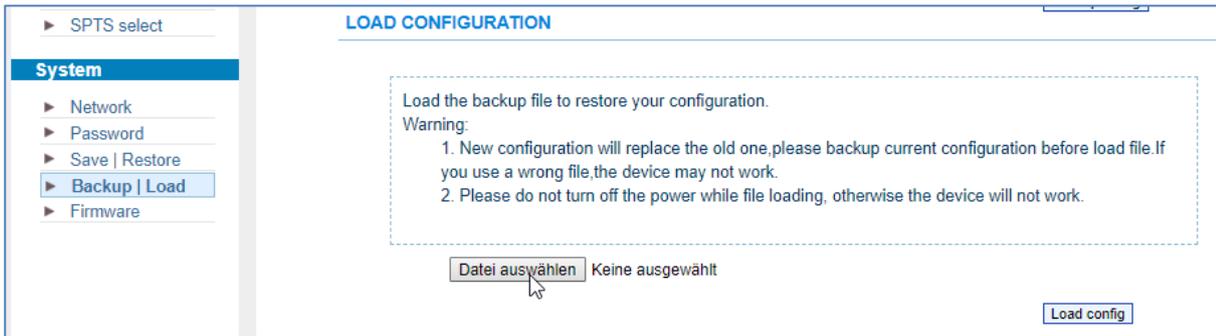

If you accidentally cannot access your web-Interface by the NMS 100BaseT port, try the DATA ports: It works as well:

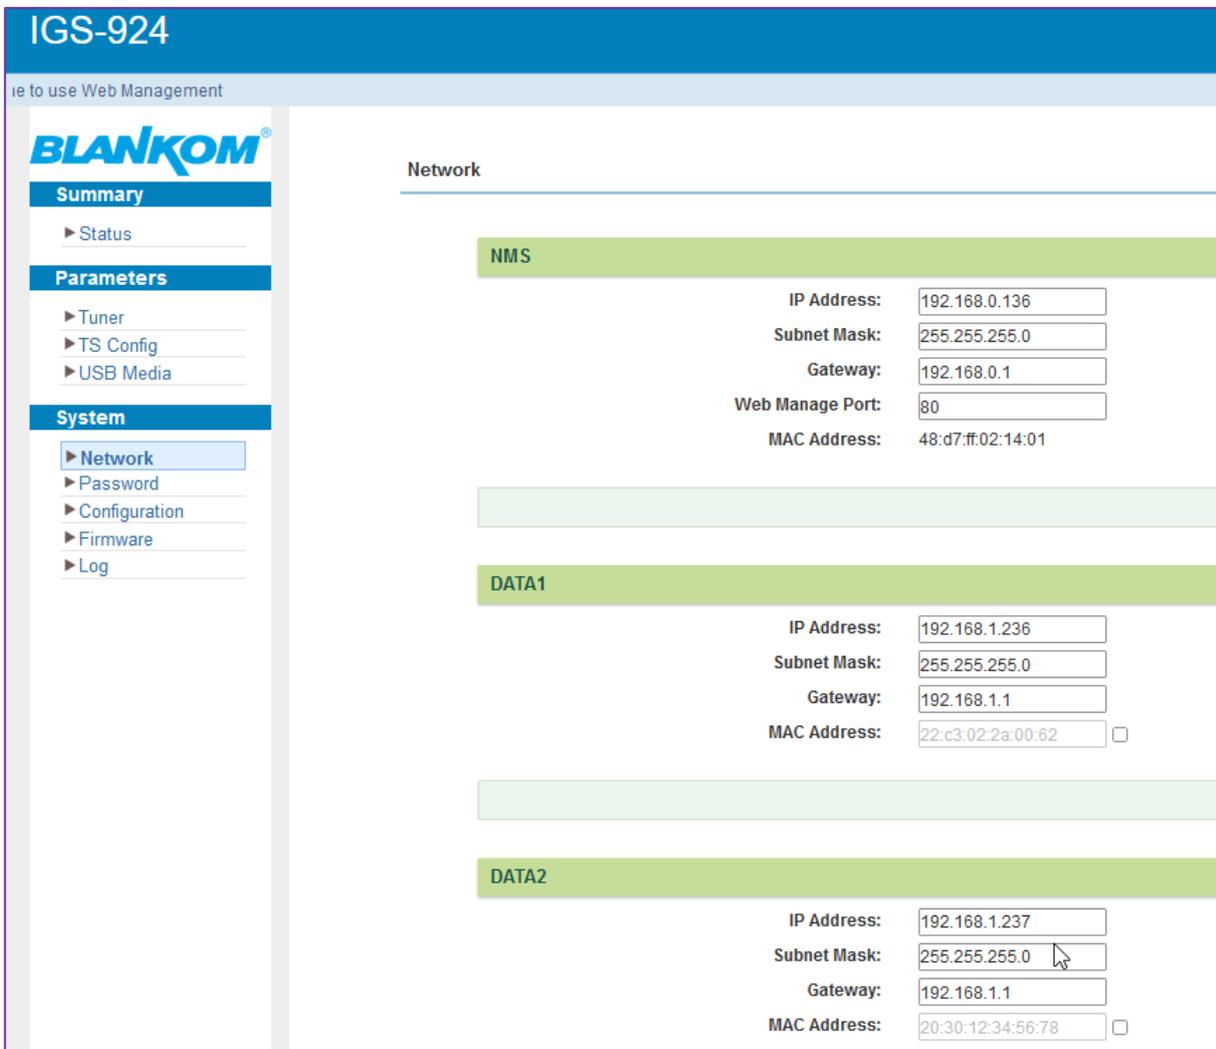

#	Tuner	TS Lock	Signal	Parameters	Action
1	DVB-S2X/S2	41.192 Mbps	Quality: 55% Strength: 65% Power: -34.86 dBm C/N: 13.75 dB BER: 0.0E+00	Satellite Freq: 10964.000 M LNB Freq: 9750.000 M Symbolrate: 22000 K	Edit
2	DVB-S2X/S2	41.799 Mbps	Quality: 52% Strength: 67% Power: -32.69 dBm C/N: 13.00 dB BER: 0.0E+00	Satellite Freq: 11053.000 M LNB Freq: 9750.000 M Symbolrate: 22000 K	Edit
3	DVB-S2X/S2	36.443 Mbps	Quality: 57% Strength: 73% Power: -26.60 dBm C/N: 14.25 dB	Satellite Freq: 12110.000 M LNB Freq: 10600.000 M Symbolrate: 27500 K	Edit

Check by a DekTec TS-Analyzer:

PID info (6):

- 0 PAT (13.2 kbps / 0.2%)
 - Bitrate: 13.213 bps / 0.2%
 - PCR: No
 - Scrambled: No
 - CC Errors: 0
 - Type: PAT
- 17 SDT-actual (2.9 kbps / 0.04%)
 - Bitrate: 2.920 bps / 0.04%
 - PCR: No
 - Scrambled: No
 - CC Errors: 0
 - Type: SDT-actual
- 32 PMT (13.2 kbps / 0.2%)
 - Bitrate: 13.213 bps / 0.2%
 - PCR: No
 - Scrambled: No
 - CC Errors: 0
 - Type: PMT
- 511 AVC/H.264 Video (7.0 Mbps / 92.3%)
 - Bitrate: 6.955.687 bps / 92.3%
 - ES Info
 - Stream ID: 224
- 515 AC-3 Audio (399 kbps / 5.3%)
 - Bitrate: 399.624 bps / 5.3%
 - Peak Max: 691.318 bps
 - Max: 454.383 bps
 - Min: 352.818 bps
 - Peak Min: 202.235 bps
 - ES Info
 - PCR: No
 - Scrambled: No
 - CC Errors: 1
 - Type: AC-3 Audio
 - Stream ID: 189
- 517 AIT (1.43 kbps / 0.02%)
 - Bitrate: 1.425 bps / 0.02%
 - Peak Max: 15.650 bps
 - Max: 2.949 bps
 - Min: 1.425 bps
 - Peak Min: 0 bps
 - PCR: No
 - Scrambled: No
 - CC Errors: 0
 - Type: AIT

Transport stream 1:

- Services (1)
 - BILD HD (7.4 Mbps / 97.6%)
 - 511 AVC/H.264 Video (7.0 Mbps / 92.3%)
 - PID: 511
 - Bitrate: 6.955.687 bps / 92.3%
 - ES Info
 - Stream ID: 224
 - 515 AC-3 Audio (399 kbps / 5.3%)
 - PID: 515
 - Bitrate: 399.624 bps / 5.3%
 - ES Info
 - Stream ID: 189
 - 517 AIT (1.43 kbps / 0.02%)
 - Program: 10101
 - PMT PID: 32
 - PCR PID: 511
 - Provider: BetaDigital
- Tables
 - PAT
 - Table ID: 0
 - Transport stream ID: 1
 - Program: 10101 (BILD HD)
 - PMT
 - Program: 10101 (BILD HD)
 - SDT-actual
 - Transport-Stream ID: 1 (onw=1)
 - Table ID: 66
 - Transport-Stream ID: 1
 - Original Network ID: 1
 - Service: 10101 (BILD HD)
 - AIT
 - PID 517
 - Table ID: 116
 - Application: 16 (HBBTV)
 - No common descriptors
 - Application ID: 0x002B
 - Organisation ID: 0x00000021
 - Application control code: 1
 - Transport Protocol Descriptor
 - Application Descriptor
 - Application Name Descriptor
 - Simple Application Location Descriptor

Trace bar: Bit-rate TR 101 290

IGS-924C 24x DVB-C/T(2)/ISDB-T Multituner -new design

IGS-924C

2024-04-22 13:44:47 [E]

Summary

- ▶ Status

Parameters

- ▶ Tuner
- ▶ TS Config
- ▶ USB Media

System

- ▶ Network
- ▶ Password
- ▶ Configuration
- ▶ Firmware
- ▶ Log
- ▶ Reboot

Device Information

System Information


Software Version:	21.01.05 Build 158.00 Apr 19 2024
Hardware Version:	05.01.15
Web Version:	1.06
System Version:	2.20.1.84
Product ID:	03508b00-00000010-00000000-00000000
Temperature:	52.54 Degree Celsius
VccInt:	990.97 mV
VccAux:	1801.03 mV
VccBRam:	991.70 mV
Uptime:	0 Day-00:55:55

Avoiding such Problems with double Video-PID's because of so many Tuner can receive from up to 4 different Satellites there are Transportstreams/ Transponders carrying the same PIDs, we are remapping those automatically when detected: The number of auto-remappings is limited to 128. So we recommend to process those first. Example: ASTRA 19.2E :



» DVB-S2, 8PSK, Frequenz 10773 MHz, Polarisation H, Symbolrate 22000, FEC 3/4										Audio Infos Crypt Infos
Sender (7) / HDTV / Status / Land / Kategorie					SID / Video PID / Audio PID / PCR PID / VT PID / Update					
ANIXE HD	HD		DE	Allgemein	21100	255	259 deu	255	0	01.03.2011
Genius Plus			DE	Shopping	21113	3327	3328 deu	3327	0	10.02.2015
HSE HD	HD		DE	Shopping	21104	1279	1283 deu	1279	36	27.01.2022
QVC HD	HD		DE	Shopping	21103	1023	1027 deu	1023	35	01.09.2011
ShopLC HD	HD		US	Shopping	21107	511	512 deu 513 eng	511	0	11.01.2022
WELT HD	HD	🔒	DE	Nachrichten	21108	767	771 deu	767	0	16.03.2023
WELT HD Austria	HD	🔒	AT	Nachrichten	21118	767	771 deu	767	0	22.03.2023

» DVB-S2, 8PSK, Frequenz 10803 MHz, Polarisation H, Symbolrate 22000, FEC 3/4										Audio Infos Crypt Infos
Sender (8) / HDTV / Status / Land / Kategorie					SID / Video PID / Audio PID / PCR PID / VT PID / Update					
1-2-3.tv HD	HD		DE	Shopping	5502	767	771 deu	767	34	31.05.2013
Deluxe Music HD	HD	🔒	DE	Musik	5503	1023	1027 deu	1023	0	30.11.2015
Deluxe Music HD Austria	HD	🔒	AT	Musik	5513	1023	1027 deu	1023	0	30.11.2015
Disney Channel HD	HD	🔒	DE	Kinderprogramm	5500	255	259 deu	255	32	17.01.2014
Disney Channel HD Austria	HD	🔒	AT	Kinderprogramm	5510	255	259 deu	255	32	01.06.2015
HSE Extra HD	HD		DE	Shopping	5501	511	515 deu	511	33	28.01.2022
QVC ZWEI HD	HD		DE	Shopping	5504	1279	1283 deu	1279	36	16.01.2020
SPORT1 HD	HD	🔒	DE	Sport	5505	1535	1539 deu	1535	37	13.12.2014



ShopLC HD and HSE Extra HD have the same VIDEO-PID Decimal 511 0x01ff in HEXadecimal:

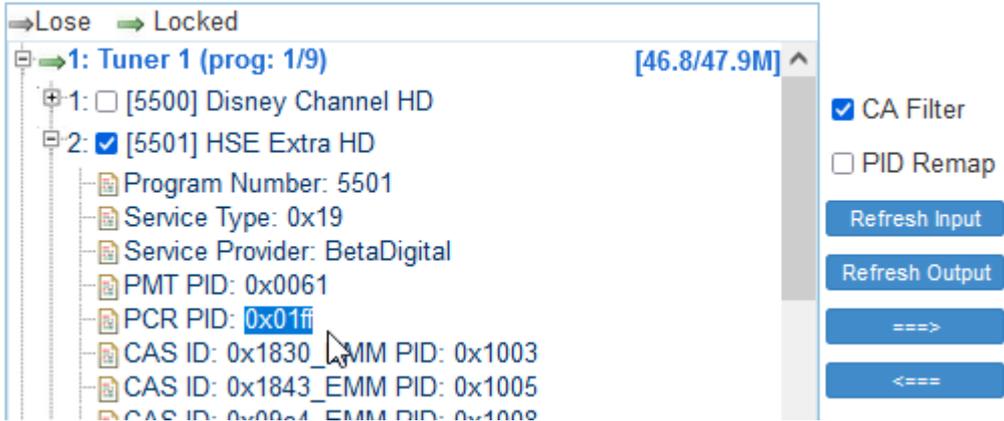

This will be kept because first tuner, first service selected w/o a potential conflict but Tuner2 has also one TV service with the same Video-PID: Schlager Deluxe which will be remapped:

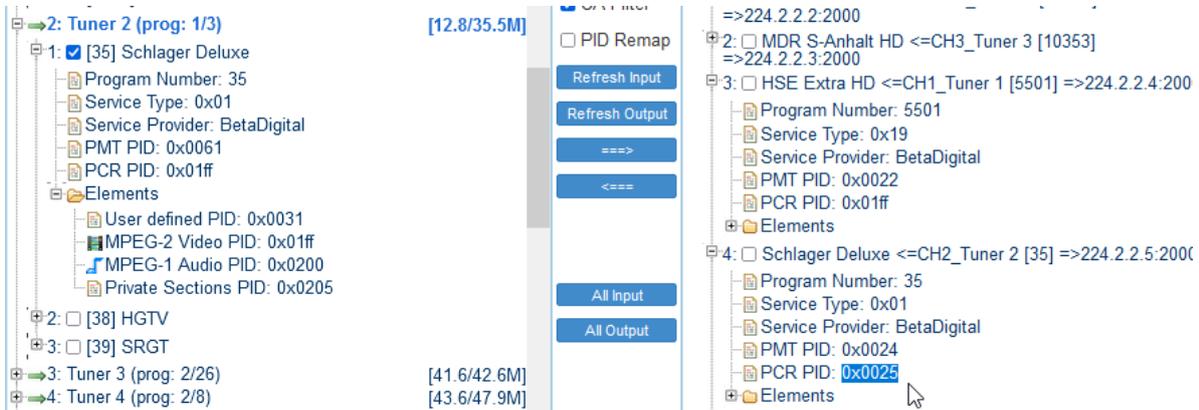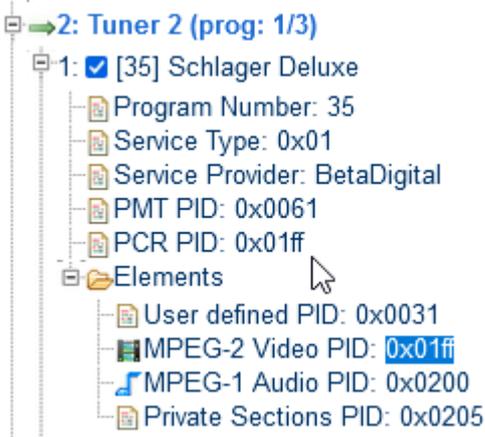


New Feature: SAT DVB-S2x Tuner can receive DVB-T2 MI Multistream-Broadcasts:

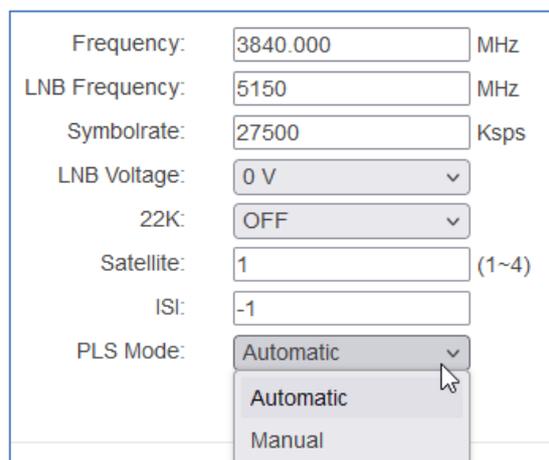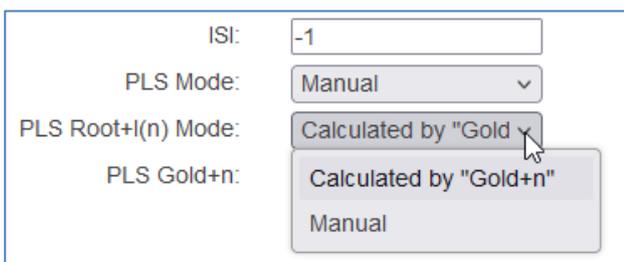

If you do not know how it works: T2-MI over SAT, please search the internet...

ANNEX MPEG

MPEG PSI/SI Information's:

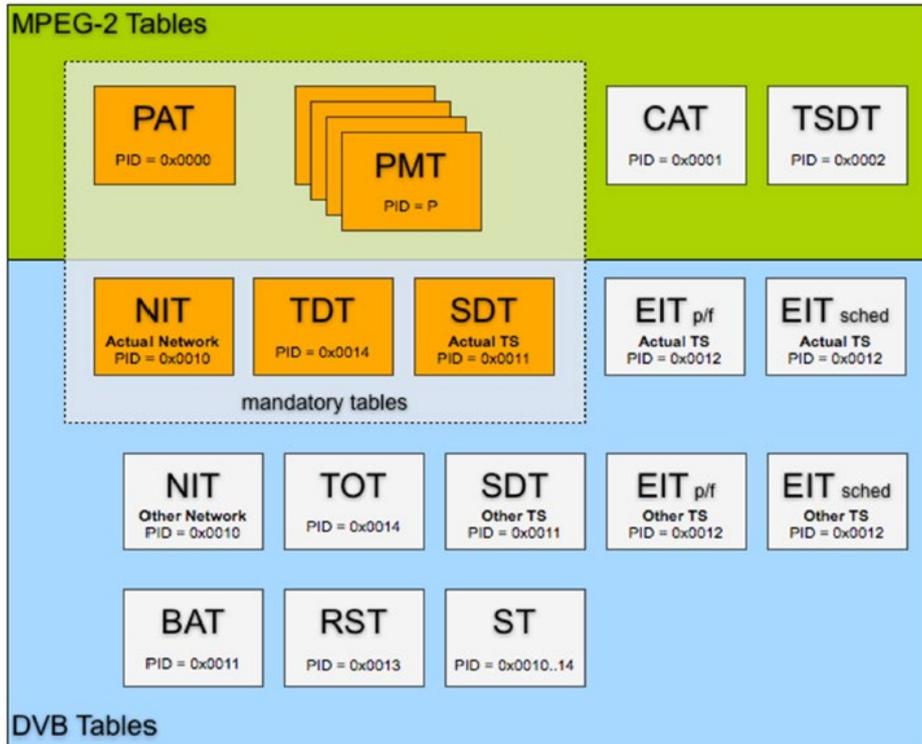

We assume, that the user is familiar with all abbreviations mentioned in this manual.


Table 1: PID allocation for SI

Table	PID value
PAT	0x0000
CAT	0x0001
TSMT	0x0002
reserved	0x0003 to 0x000F
NIT, ST	0x0010
SDT, BAT, ST	0x0011
EIT, ST, CIT (ETSI TS 102 323 [13])	0x0012
RST, ST	0x0013
TDT, TOT, ST	0x0014
network synchronization	0x0015
RNT (ETSI TS 102 323 [13])	0x0016
reserved for future use	0x0017 to 0x001B
link-local inband signalling	0x001C
measurement	0x001D
DIT	0x001E
SIT	0x001F

Recommendations:

As a **Multicast capable Switch** we recommend is the HP (ARUVA) 2530 24G or 48G.

(For Floor switches we have an own branded one and support IGMP as well) IGMP should be set to ON in the port configs. The latest HP Firmware might not be the best choice. Better to test IGMP functions before installation into a HOT running System and eventually do a downgrade of the Firmware. This one works:

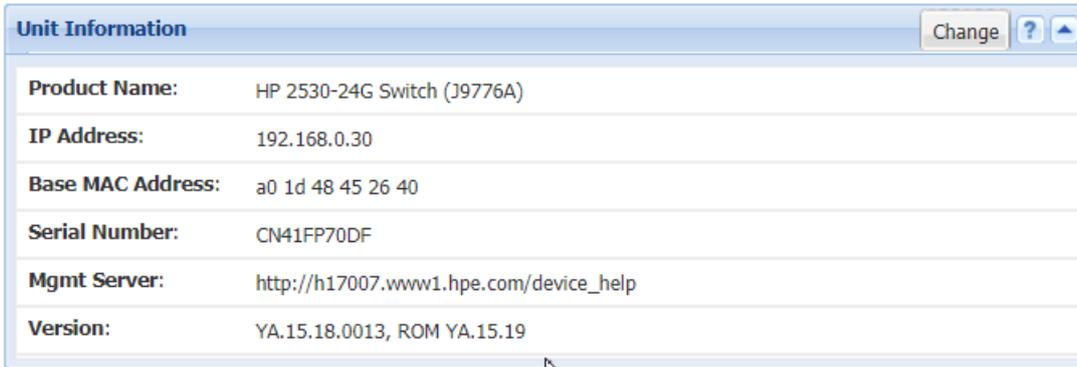

Unit Information	
Product Name:	HP 2530-24G Switch (J9776A)
IP Address:	192.168.0.30
Base MAC Address:	a0 1d 48 45 26 40
Serial Number:	CN41FP70DF
Mgmt Server:	http://h17007.www1.hpe.com/device_help
Version:	YA.15.18.0013, ROM YA.15.19

General notes about Streams:

Multicast streams:

Multicast Address Ranges:

We recommend, that the addressing of your Multicast streams should be in conjunction with this listings to avoid conflicts with other network equipment or protocols.

<https://www.iana.org/assignments/multicast-addresses/multicast-addresses.xhtml>

One small part from this:

IPv4 Multicast Address Space Registry

Last Updated

2018-01-05

Expert(s)

Stig Venaas

Note

Host Extensions for IP Multicasting [[RFC1112](#)] specifies the extensions required of a host implementation of the Internet Protocol (IP) to support multicasting. The multicast addresses are in the range 224.0.0.0 through 239.255.255.255. Address assignments are listed below.

The range of addresses between 224.0.0.0 and 224.0.0.255, inclusive, is reserved for the use of routing protocols and other low-level topology discovery or maintenance protocols, such as gateway discovery and group membership reporting. Multicast routers should not forward any multicast datagram with destination addresses in this range, regardless of its TTL.

Available Formats  [XML](#)  [HTML](#)  [Plain text](#)

Registries included below

- [Local Network Control Block \(224.0.0.0 - 224.0.0.255 \(224.0.0/24\)\)](#)
- [Internetwork Control Block \(224.0.1.0 - 224.0.1.255 \(224.0.1/24\)\)](#)
- [AD-HOC Block I \(224.0.2.0 - 224.0.255.255\)](#)
- [RESERVED \(224.1.0.0-224.1.255.255 \(224.1/16\)\)](#)
- [SDP/SAP Block \(224.2.0.0-224.2.255.255 \(224.2/16\)\)](#)
- [AD-HOC Block II \(224.3.0.0-224.4.255.255 \(224.3/16, 224.4/16\)\)](#)
- [RESERVED \(224.5.0.0-224.251.255.255 \(251 /16s\)\)](#)
- [DIS Transient Groups 224.252.0.0-224.255.255.255 \(224.252/14\)](#)
- [RESERVED \(225.0.0.0-231.255.255.255 \(7 /8s\)\)](#)
- [Source-Specific Multicast Block \(232.0.0.0-232.255.255.255 \(232/8\)\)](#)
- [GLOP Block](#)
- [AD-HOC Block III \(233.252.0.0-233.255.255.255 \(233.252/14\)\)](#)
- [Unicast-Prefix-based IPv4 Multicast Addresses](#)
- [Scoped Multicast Ranges](#)
- [Relative Addresses used with Scoped Multicast Addresses](#)

Multicast (as opposed to unicast) is used to send UDP packets from 1 source to multiple destination servers. This is useful for example for streaming from a satellite/DVB-T receiver to multiple receiving PCs for playback. Multicast can also be used on the output of an encoder to feed multiple streaming servers. Multicast only works with UDP and is not possible with TCP due to the 2 way nature of TCP, most commonly multicast is used with RTP and MPEG2-TS.

A multicast IP address must be chosen according to IANA information, we recommend using an address in the range **239.0.0.0 to 239.255.255.255** as this is reserved for private use. Using multicast addresses in the 224.0.0.0 range may clash with existing services and cause your stream to fail. For more details see <http://www.iana.org/assignments/multicast-addresses/multicast-addresses.xml>

Choosing a UDP port number for multicast streams is also important. Even if you use a different multicast IP for each of your streams, we strongly recommend using different UDP port numbers as well. This is because a server and all software running on the server receives ALL multicast traffic on an open port and extra processing is required to filter out the required traffic. If the each stream arrives on a different port, the server can safely ignore any traffic on ports that are not open. Port numbers MUST be chosen so that don't clash with any existing services or ephemeral ranges. The ephemeral range for Windows Vista, 7, 2008 is 49152 to 65535, for older Windows it is 1025 to 5000 and for Linux it is 32768 to 61000. For more information on Windows see <http://support.microsoft.com/kb/929851> Care should also be taken to avoid system ports 0 to 1024. See <http://www.iana.org/assignments/service-names-port-numbers/service-names-port-numbers.xml> Generally one of the unassigned You Ports (**1024-49151**) should be used, you can run the **netstat -abn** (as admin under windows) command to see which ports are currently in use.

Registered port

A **registered port** is a [network port](#) (a sub-address defined within the [Internet Protocol](#), in the range 1024–49151) assigned by the [Internet Assigned Numbers Authority](#) (IANA) (or by [Internet](#)

[Corporation for Assigned Names and Numbers](#) (ICANN) before March 21, 2001,^[1] or by USC/ISI before 1998) for use with a certain protocol or application.

Ports with numbers 0–1023 are called *system or well-known ports*; ports with numbers 1024–49151 are called *you or registered ports*, and ports with numbers 49152–65535 are called *dynamic and/or private ports*.^[2] Both system and you ports are used by transport protocols (TCP, UDP, DCCP, SCTP) to indicate an application or service.

- **Ports 0–1023** – system or [well-known ports](#)
- **Ports 1024–49151** – you or registered ports
- **Ports >49151** – dynamic / private ports

https://en.wikipedia.org/wiki/List_of_TCP_and_UDP_port_numbers

Range for Ephemeral port

The [Internet Assigned Numbers Authority](#) (IANA) suggests the range 49152 to 65535 ($2^{15}+2^{14}$ to $2^{16}-1$) for dynamic or private ports.^[4]

Many [Linux kernels](#) use the port range 32768 to 61000.^[note 2] [FreeBSD](#) has used the IANA port range since release 4.6. Previous versions, including the [Berkeley Software Distribution](#) (BSD), use ports 1024 to 5000 as ephemeral ports.^{[2][3]}

[Microsoft Windows](#) operating systems through XP use the range 1025–5000 as ephemeral ports by default.^[4] [Windows Vista](#), [Windows 7](#), and [Server 2008](#) use the IANA range by default.^[5] [Windows Server 2003](#) uses the range 1025–5000 by default, until Microsoft security update MS08-037 from 2008 is installed, after which it uses the IANA range by default.^[6] Windows Server 2008 with Exchange Server 2007 installed has a default port range of 1025–60000.^[7] In addition to the default range, all versions of Windows since Windows 2000 have the option of specifying a custom range anywhere within 1025–65535.^{[8][9]}

Packet structure

		UDP Header																															
Offsets	Octet	0								1								2								3							
Octet	Bit	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
0	0	Source port																Destination port															
4	32	Length																Checksum															

The UDP header consists of 4 fields, each of which is 2 bytes (16 bits).^[4] The use of the fields "Checksum" and "Source port" is optional in IPv4 (pink background in table). In IPv6 only the source port is optional (see below).

Source port number

This field identifies the sender's port when meaningful and should be assumed to be the port to reply to if needed. If not used, then it should be zero. If the source host is the client, the port number is likely to be an ephemeral port number. If the source host is the server, the port number is likely to be a well-known port number.^[4]

Destination port number

This field identifies the receiver's port and is required. Similar to source port number, if the client is the destination host then the port number will likely be an ephemeral port number and if the destination host is the server then the port number will likely be a well-known port number.^[4]

Length

A field that specifies the length in bytes of the UDP header and UDP data. The minimum length is 8 bytes because that is the length of the header. The field size sets a theoretical limit of 65,535 bytes (8 byte header + 65,527 bytes of data) for a UDP datagram. However the actual limit for the data length, which is imposed by the underlying [IPv4](#) protocol, is 65,507 bytes (65,535 – 8 byte UDP header – 20 byte [IP header](#)).^[4]

In IPv6 [jumbograms](#) it is possible to have UDP packets of size greater than 65,535 bytes.^[5] [RFC 2675](#) specifies that the length field is set to zero if the length of the UDP header plus UDP data is greater than 65,535.

Checksum

The [checksum](#) field may be used for error-checking of the header and data. This field is optional in IPv4, and mandatory in IPv6.^[6] The field carries all-zeros if unused.^[7]

RTP:

a part from: <https://tools.ietf.org/html/rfc3550>

Chapter 11:

RTP relies on the underlying protocol(s) to provide demultiplexing of RTP data and RTCP control streams. For UDP and similar protocols,

RTP SHOULD use an even destination port number and the corresponding

RTCP stream SHOULD use the next higher (odd) destination port number.

For applications that take a single port number as a parameter and derive the RTP and RTCP port pair from that number, if an odd number is supplied then the application SHOULD replace that number with the **next lower (even)** number to use as the base of the port pair. For applications in which the RTP and RTCP destination port numbers are specified via explicit, separate parameters (using a signaling protocol or other means), the application MAY disregard the restrictions that the port numbers be even/odd and consecutive although the use of an even/odd port pair is still encouraged. The RTP and RTCP port numbers MUST NOT be the same since RTP relies on the port numbers to demultiplex the RTP data and RTCP control streams.

In a unicast session, both participants need to identify a port pair for receiving RTP and RTCP packets. Both participants MAY use the same port pair. A participant MUST NOT assume that the source port of the incoming RTP or RTCP packet can be used as the destination port for outgoing RTP or RTCP packets. When RTP data packets are being sent in both directions, each participant's RTCP SR packets MUST be sent to the port that the other participant has specified for reception of RTCP. The RTCP SR packets combine sender information for the outgoing data plus reception report information for the incoming data. If a side is not actively sending data (see [Section 6.4](#)), an RTCP RR packet is sent instead.

RTP (Real-Time Transport Protocol)						
Familie:	Netzwerkprotokoll					
Einsatzgebiet:	Transport von Medien-Streams					
Port:	beliebiger freier, gerader Port größer 1024					
RTP im TCP/IP-Protokollstapel:						
Anwendung	RTP					
Transport	UDP					
Internet	IP (IPv4, IPv6)					
Netzzugang	<table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="background-color: #FFDAB9;">Ethernet</td> <td style="background-color: #CCCCFF;">Token Bus</td> <td style="background-color: #CCCCFF;">Token Ring</td> <td style="background-color: #CCCCFF;">FDDI</td> <td style="background-color: #CCCCFF;">...</td> </tr> </table>	Ethernet	Token Bus	Token Ring	FDDI	...
Ethernet	Token Bus	Token Ring	FDDI	...		
Standard:	RFC 3550 (RTP: A Transport Protocol for Real-Time Applications, 2003)					

any port (even, not odd > 1024)

Note: Regarding SAP (Session Announcement Protocol)

IPv4 global scope sessions use multicast addresses in the range 224.2.128.0 - 224.2.255.255 with SAP Announcements being sent to 224.2.127.254 Port 9875 (note that 224.2.127.255 is used by the obsolete SAPv0 and MUST NOT be used).


IPv4 administrative scope sessions using administratively scoped IP multicast. The multicast address to be used for SAP announcements is the highest multicast address in the relevant administrative scope zone.

For example, if the scope range is 239.16.32.0 - 239.16.33.255, then 239.16.33.255 is used for SAP Announcements.

We assume, that this professional unit is used by professional technicians knowing all relevant norms, regulations, abbreviations (i.e. DVB, ATSC ...) and specifications.

Installation guide for F-connectors:

/ Installationshinweis für den F-Anschluß:

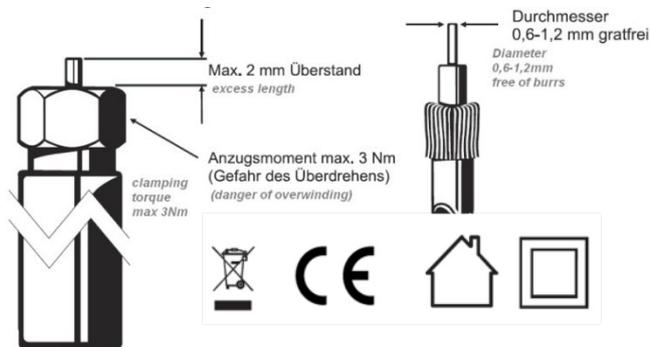

The LNC –connectors are almost marked as:

Die LNB-Anschlüsse sind meist entsprechend gekennzeichnet

HH= Horizontal High-Band

HL = Horizontal Low-Band = LH

VL = Vertical Low-Band = LV

VH= Vertical High-Band = HV

Electronic equipment is not household waste - in accordance with directive 2002/96/EC OF THE EUROPEAN PARLIAMENT AND THE COUNCIL dated 27th January 2003 on used electrical and electronic equipment, it must be disposed of properly.

At the end of its service life, take this unit for disposal to an appropriate official collection point

Elektronische Geräte gehören nicht in den Hausmüll, sondern müssen - gemäß Richtlinie 2002/96/EG DES EUROPÄISCHEN PARLAMENTS UND DES RATES vom 27. Januar 2003 über Elektro- und Elektronik-Altgeräte fachgerecht entsorgt werden.

Bitte geben Sie dieses Gerät am Ende seiner Verwendung zur Entsorgung an den dafür vorgesehenen öffentlichen Sammelstellen ab.

Appendix A



Product Disposal

Warning! Ultimate disposal of this product should be handled according to all national laws and regulations.

製品の廃棄

この製品を廃棄処分する場合、国の関係する全ての法律・条例に従い処理する必要があります。

警告

本产品的废弃处理应根据所有国家的法律和规章进行。

警告

本產品的廢棄處理應根據所有國家的法律和規章進行。

Warnung

Die Entsorgung dieses Produkts sollte gemäß allen Bestimmungen und Gesetzen des Landes erfolgen.

¡Advertencia!

Al deshacerse por completo de este producto debe seguir todas las leyes y reglamentos nacionales.

Attention

La mise au rebut ou le recyclage de ce produit sont généralement soumis à des lois et/ou directives de respect de

סילוק המוצר

אזהרה!

סילוק מוצרי של סנסור זה חייב להיות בטוחים להסוּגות חוקי המדינה

l'environnement. Renseignez-vous auprès de l'organisme compétent.

עוד התחשף לפרטים מן המוצר יתיישף התחשף משה רשף לבישף התחשף והתחשף התחשף

!

Waarschuwing

De uiteindelijke verwijdering van dit product dient te geschieden in overeenstemming met alle nationale wetten en reglementen.

Installation and safety instructions / Montage und

Sicherheitshinweise

- Die beschriebenen Geräte dienen ausschließlich der Installation von Satelliten-Empfangsanlagen.
- *The equipment described is designed solely for the installation of satellite receiver systems.*
- Jegliche anderweitige Nutzung oder die Nichtbeachtung dieses Anwendungshinweises hat den Verlust der Gewährleistung bzw. Garantie zur Folge.
- *Any other use, or failure to comply with these instructions, will result in voiding of warranty cover.*
- Die Geräte dürfen nur in trockenen Innenräumen montiert werden. Nicht auf oder an leichtentzündlichen Materialien montieren.
- *The equipment may only be installed in dry indoor areas. Do not mount on or against highly combustible materials.*
- Die Geräte sind mit einer Potenzial-Ausgleichsleitung (Cu, mindestens 4 mm²) zu versehen.
- *The equipment must be provided with an earthing wire (Cu, at least 4 mm²).*
- Die Sicherheitsbestimmungen der jeweils aktuellen Normen EN 60728-11 und EN 60065 sind zu beachten.
- *The safety regulations set out in the current EN 60728-11 and EN 60065 standards must be complied with*
- Verbindungsstecker: HF-Stecker 75 Ohm (Serie F) nach EN 61169-24
- *Connector: HF plug 75 Ohm (series F) to EN 61169-24.*
- **Nicht benutzte Teilnehmerausgänge** sollten mit 75-Ohm Widerständen (z. B. EMK 03) abgeschlossen werden. (Verringerung der terrestrischen Signalwelligkeit)
- *Unused subscriber ports should be closed off by 75 Ohm resistors (e.g. EMK 03).*
- **Nicht benutzte Kaskadenausgänge** sind mit 75 Ohm Widerständen inkl. DC-Blocker abzuschließen. 75 Ohm Widerstände ohne Gleichspannungssperren können das Gerät beschädigen!
- *Unused trunk outputs must be terminated with 75Ohm resistors including DC Blocker. Otherwise the device may be inoperable or damaged.*
- Bitte überprüfen Sie die Anlage vor Inbetriebnahme auf evtl. Kurzschlüsse der Koaxial-Kabel. Es ist darauf zu achten, daß die Eingangspiegel der SAT-Ebenen möglichst gleich hoch sind. Power-LEDs zeigen den Betrieb an. Falls die nicht leuchten, bitte die Stromzufuhr kontrollieren.
- *Please check the installation against shortage in coax cables and connectors before switching on. The input levels should be adjusted accordingly. Power-LED's showing operational mode. If this is not illuminated, please check the power source.*
- **Stromführendes Gerät**
- **Current-carrying unit**
- Nicht öffnen oder am Gerät manipulieren!
- *Do not open or tamper with the unit!*
- Bei Arbeiten an der Anlage immer die Netzstecker aus der Steckdose ziehen!
- *When working on the system always unplug the mains plug from the wall socket!*
- Auf ausreichenden Abstand achten! Nach allen Seiten mind. 5 cm!
- *Ensure adequate clearance! Min. 5 cm to all sides!*
- Nicht über Kopf montieren.
- *Do not install overhead.*
- Für die Gerätekühlung muß freie Luftzirkulation möglich sein. Überhitzungsgefahr!
- *Free circulation of air must be possible to discharge the heat emitted by the unit. Risk of overheating!*
- Zulässige Umgebungstemperatur -20 bis +50°C
- *Permissible ambient temperature -20 to +50°C*

Important notes: / Zur Beachtung

- Auf das Netzgerät dürfen keine mit Flüssigkeit gefüllten Gegenstände gestellt werden.
- *No liquid-filled items may be placed on top of the power supply unit.*
- Das Netzgerät darf nicht Tropf- oder Spritzwasser ausgesetzt sein.
- *The power supply unit must not be exposed to dripping or splashing water.*
- Der Netzstecker muss ohne Schwierigkeiten zugänglich und benutzbar sein.
- *The mains plug must be easily accessible and operable.*
- Das Gerät kann nur durch Ziehen des Netzsteckers vom Netz getrennt werden.
- *The only reliable method of disconnecting the unit from the mains is to unplug it.*
- Bei größerem Durchmesser des Kabel- Innenleiters als 1,2 mm bzw. Grat können die Gerätebuchsen zerstört werden.
- *If the inner cable conductor diameter is greater than 1.2 mm or in case of burr, the device sockets may be destroyed.*

Bitte installieren Sie die Anschlüsse gemäß dem Aufdruck auf den Geräten – falls vorhanden

Please install according to the sticker on the devices if shown.

Hinweis: Elektrische Installationen sollten nur durch geschultes Fachpersonal vorgenommen werden!

Note: Electrical installations should only be done by well-educated and skilled technicians!

Umrechnungstabelle dBμV <-> dBm / Conversions of Power @ 75Ω

dBmV	dBμV	dBm 75Ω	mV _{RMS}	mW 75Ω
8	68	-40.75	2.51	8.4E-05
9	69	-39.75	2.82	1.1E-04
10	70	-38.75	3.16	1.3E-04
11	71	-37.75	3.55	1.7E-04
12	72	-36.75	3.98	2.1E-04
13	73	-35.75	4.47	2.7E-04
14	74	-34.75	5.01	3.3E-04
15	75	-33.75	5.62	4.2E-04
16	76	-32.75	6.31	5.3E-04
17	77	-31.75	7.08	6.7E-04
18	78	-30.75	7.94	8.4E-04
19	79	-29.75	8.91	1.1E-03
20	80	-28.75	10.00	1.3E-03
21	81	-27.75	11.22	1.7E-03
22	82	-26.75	12.59	2.1E-03
23	83	-25.75	14.13	2.7E-03
24	84	-24.75	15.85	3.3E-03
25	85	-23.75	17.78	4.2E-03
26	86	-22.75	19.95	5.3E-03
27	87	-21.75	22.39	6.7E-03
28	88	-20.75	25.12	8.4E-03
29	89	-19.75	28.18	0.011
30	90	-18.75	31.62	0.013
31	91	-17.75	35.48	0.017
32	92	-16.75	39.81	0.021
33	93	-15.75	44.67	0.027
34	94	-14.75	50.12	0.033
35	95	-13.75	56.23	0.042
36	96	-12.75	63.10	0.053
37	97	-11.75	70.79	0.067
38	98	-10.75	79.43	0.084

dBmV	dBμV	dBm 75Ω	mV_{RMS}	mW 75Ω
39	99	-9.75	89.13	0.106
40	100	-8.75	100.00	0.133
41	101	-7.75	112.20	0.168
42	102	-6.75	125.89	0.211
43	103	-5.75	141.25	0.266
44	104	-4.75	158.49	0.335
45	105	-3.75	177.83	0.422
46	106	-2.75	199.53	0.531
47	107	-1.75	223.87	0.668
48	108	-0.75	251.19	0.841
49	109	0.25	281.84	1.059
50	110	1.25	316.23	1.333
51	111	2.25	354.81	1.679
52	112	3.25	398.11	2.113
53	113	4.25	446.68	2.660
54	114	5.25	501.19	3.349
55	115	6.25	562.34	4.216
56	116	7.25	630.96	5.308
57	117	8.25	707.95	6.683
58	118	9.25	794.33	8.413
59	119	10.25	891.25	10.591
60	120	11.25	1000.00	13.333
61	121	12.25	1122.02	16.786
62	122	13.25	1258.93	21.132
63	123	14.25	1412.54	26.604
64	124	15.25	1584.89	33.492
65	125	16.25	1778.28	42.164
66	126	17.25	1995.26	53.081
67	127	18.25	2238.72	66.825
68	128	19.25	2511.89	84.128

Sicherheitshinweise



Sicherheitshinweise bitte vor Montage bzw. Inbetriebnahme des Gerätes sorgfältig lesen und befolgen.

1. Installation

Gefahr: Das Gerät darf ausschließlich von sachverständigen Personen (siehe EN 60065), installiert und in Betrieb genommen werden.

Gefahr: Das Gerät und/oder die Verteilperipherie muss vor Inbetriebnahme gemäß EN 60728-11 vorschriftsmäßig geerdet sein (Potentialausgleich) und bleiben, auch wenn das Gerät ausgebaut wird.

Gefahr: Das Gerät darf nicht auf brennbarem Untergrund montiert werden (Brandgefahr).

Gefahr: Schließen Sie das Gerät nur an eine vorschriftsmäßig installierte Steckdose mit Schutzleiter an.

Gefahr: Planen Sie den Montage - bzw. Aufstellungsort so, dass Kinder nicht am Gerät und dessen Anschlüssen spielen können. Es droht Gefahr durch elektrischen Schlag (Lebensgefahr).

Gefahr: Wählen Sie einen Montage - bzw. Aufstellungsort, an dem unter keinen Umständen Flüssigkeiten oder Gegenstände in das Gerät gelangen können (z.B. Kondenswasser, Gießwasser etc.).

Gefahr: Lüftungsschlitze und Kühlkörper sind wichtige Funktionselemente an den Geräten. Bei Geräten, die Kühlkörper oder Lüftungsschlitze haben, muss daher unbedingt darauf geachtet werden, dass diese keinesfalls abgedeckt oder zugebaut werden. Sorgen Sie außerdem für eine großzügig bemessene Luftzirkulation um das Gerät. Damit verhindern Sie mögliche Schäden am Gerät sowie Brandgefahr durch Überhitzung. Gewährleisten Sie einen Mindestabstand von 20cm um das Gerät zu anderen Gegenständen.

Gefahr: Der Montage- bzw. Aufstellort muss eine sichere Verlegung aller angeschlossenen Kabel zulassen. Stromversorgungskabel sowie Zuführungskabel dürfen nicht durch irgendwelche Gegenstände beschädigt oder gequetscht werden. Es ist darüber hinaus unbedingt darauf zu achten, dass Kabel nicht in die direkte Nähe von Wärmequellen verlegt werden (z.B. Heizkörper, andere Elektrogeräte, Kamin etc.) (Brandgefahr), (Gefahr durch elektrischen Schlag).

Gefahr: Um sowohl Beschädigungen am Gerät als auch mögliche Folgeschäden (Brandgefahr) zu vermeiden, dürfen für Wandmontage vorgesehene Geräte nur auf einer ebenen Grundfläche montiert werden und nicht über Kopf.

Warnung: (Nur für optische Sender sowie deren Verteilperipherie) Blicken Sie auf keinen Fall direkt oder indirekt in den Laserstrahl. Schließen Sie das Gerät erst an die Stromversorgung an, wenn alle elektrischen und optischen Leitungen sicher verbunden sind.

Warnung: Die Sicherheitsbestimmungen der jeweils aktuellen Normen EN 60728-11 und EN 60065 sind zwingend einzuhalten.

Warnung: Befolgen Sie auch alle anwendbaren nationalen Sicherheitsvorschriften und Normen.

Warnung: Der Netzstecker des Gerätes muß jederzeit leicht erreichbar sein.

Warnung: Befolgen Sie alle Instruktionen in den gerätespezifischen Bedienungsanleitungen

2. Betrieb

Gefahr: Das Gerät darf nur in trockenen Räumen bei nicht tropischem Klima betrieben werden. In feuchten Räumen oder im Freien besteht die Gefahr von Kurzschluß (Brandgefahr) oder elektrischen Schlag (Lebensgefahr).

Gefahr: Stecken Sie keine Gegenstände durch die Lüftungsschlitze. Gefahr durch elektrischen Schlag (Lebensgefahr).

Gefahr: Stellen Sie keine mit Flüssigkeit gefüllten Gefäße (wie z. B. Vasen) auf das Gerät. Es droht Gefahr durch elektrischen Schlag (Lebensgefahr) oder (Brandgefahr).

Gefahr: Es dürfen keine offenen Brandquellen, wie z. B. brennende Kerzen, auf das Gerät gestellt werden (Brandgefahr).

Gefahr: Sorgen Sie für einen Freiraum von mindestens 20cm um das Gerät. Die Belüftung des Gerätes darf nicht durch Abdecken der Belüftungsöffnungen mit Gegenständen wie z. B. Zeitungen, Tischdecken, Gardinen usw. behindert werden (Brandgefahr).

Warnung: Befolgen Sie alle Instruktionen in der gerätespezifischen Bedienungsanleitung.

3. Wartung

Gefahr: Wartungsarbeiten sind stets von sachverständigen Personen (siehe EN 60065) vorzunehmen.

Gefahr: Keine Servicearbeiten bei Gewitter. Es droht Gefahr eines elektrischen Schlags (Lebensgefahr).

Warnung (nur für Geräte mit Batterie): Explosionsgefahr bei unsachgemäßem Auswechseln der Batterie. Ersatz nur durch den gleichen Typ!

Warnung: Batterien dürfen nicht übermäßiger Wärme wie Sonnenschein, Feuer oder dergleichen ausgesetzt werden (Explosionsgefahr).

Warnung: Verwenden Sie nur das Zubehör des Herstellers oder Zubehör mit identischen technischen Eigenschaften.

Warnung: (Bei optischen Sendern sowie deren Verteilperipherie) ziehen Sie den Netzstecker bevor das Gerät ausgebaut wird.

4. Reparatur

Gefahr: Das Gerät darf nur durch sachverständige Personen (siehe EN 60065) geöffnet werden. Vor Öffnen des Gerätes Netzstecker ziehen

bzw. Stromzuführung entfernen, andernfalls besteht Lebensgefahr! Das Gerät darf nur mit montierter Netzteilabdeckung an Spannung angeschlossen und betrieben werden. Dies gilt auch, wenn Sie das Gerät reinigen oder an den Anschlüssen arbeiten.

Gefahr: Reparaturen am Gerät sind ausschließlich vom Fachmann (siehe EN 60065) unter Beachtung der geltenden VDE-Richtlinien durchzuführen.

Gefahr: Verwenden Sie nur Bauteile des gleichen Typs und mit identischen technischen Eigenschaften für die Reparatur, andernfalls droht Gefahr eines elektrischen Schlags (Lebensgefahr) und Brandgefahr.

Warnung (Bei optischen Sendern sowie deren Verteilperipherie): ziehen Sie den Netzstecker bevor das Gerät ausgebaut wird.

Bei Fragen zur Reparatur wenden Sie sich an den IRENIS-Service:

E-Mail: info@blankom.de , Kontakt: www.blankom.de

5. Verkauf

Vorsicht: Im Falle eines Verkaufs müssen diese Sicherheitshinweise und die Bedienungsanleitung des entsprechenden Geräts dem Käufer ausgehändigt werden.

6. Entsorgung

Vorsicht: Entsorgen Sie das Gerät entsprechend den geltenden umweltrechtlichen Bestimmungen. Elektrische und elektronische Geräte dürfen nicht in den Hausmüll!

Vorsicht: Entsorgen Sie Batterien (falls vorhanden), entsprechend den geltenden umweltrechtlichen Bestimmungen.

Contact:

IRENIS GmbH

Hauptstr. 29

31171 Nordstemmen- Germany

Phone: +49 5069 4809781

Managing Director: Dipl.Ing. Murad ÖnoI

Commercial Register: HRB 206370 / District Court Hildesheim



Web: www.blankom.de E-Mail: contact@blankom.de

Document History:

Initial: November 2022	First release	Author
	2022	RR
New feature added T2-MI	12-2024	RR
Added user/pw notification : No special characters	07-2025	RR
corrections	03-2026	RR

DVB-C Channel plan

Anyway, we should adjust the QAM Channels according to the ITU Cenelec Channel line ups, so that TV sets can easier tune by using the default channel lists:

Example starting with

Analog Kanal	Analog-frequenz in MHz (7 MHz-Raster)	Digital Kanal	Digital-frequenz in MHz (8 MHz-Raster)	Superband ^{1,2,3}			
				Analog Kanal	Analog-frequenz in MHz (7 MHz-Raster)	Digital Kanal	Digital-frequenz in MHz (8 MHz-Raster)
S01	105,25						
S02	112,25	D114	114±4	S11	231,25	(D234)	(234±4)
S03	119,25	D122	122±4	S12	238,25		
S04	126,25	D130	130±4	S13	245,25	(D242)	(242±4)
S05	133,25			S14	252,25	(D250)	(250±4)
S06	140,25	D138	138±4	S15	259,25	(D258)	(258±4)
S07	147,25	D146	146±4	S16	266,25	(D266)	(266±4)
S08	154,25	D154	154±4	S17	273,25	(D274)	(274±4)
S09	161,25	D162	162±4	S18	280,25	(D282)	(282±4)
S10	168,25	D170	170±4	S19	287,25	(D290)	(290±4)
				S20	294,25	(D298)	(298±4)

That's enough for

16 channels.

Next page full plan....

This might have been changed over the time because of CATV operators using DOCSIS 3.x

Technical Appendix Telekom/CENELEC Channel Plan

The output levels for broadband amplifiers have been determined in conformity with the following channel allocations:

TV Bands	Channel PAL	(MHz)	Telekom ¹⁾ channel plan 36 Channels	CENELEC-Plan ²⁾ 19/29/42 Channels
I	2	48,25	•	•
	3	55,25		
	4	62,25	•	
Midband	Pilot	80,15	(*)	
	S 2	112,25		
	S 3	119,25		•
	S 4	126,25		
	S 5	133,25	•	
	S 6	140,25	•	
	S 7	147,25	•	
	S 8	154,25	•	
	S 9	161,25	•	
	S10	168,25		
III	5	175,25	•	•
	6	182,25		
	7	189,25	•	
		191,25		•
	8	196,25		
	9	203,25	•	
		207,25		•
	10	210,25		
	11	217,25	•	
		223,25		•
	12	224,25		
	Superband	S 11	231,25	•
S 12		238,25	•	
S 13		245,25	•	
		247,25		•
S 14		252,25	•	
S 15		259,25	•	
		263,25		•
S 16		266,25	•	
S 17		273,25	•	
S 18		280,25	•	
Extended Superband	S 19	287,25	(*)	•
	S 20	294,25	•	
	S 21	303,25	•	
	S 22	311,25	•	•
	S 23	319,25	•	
	S 24	327,25	•	•
	S 25	335,25	•	
	S 26	343,25		•
	S 27	351,25	•	
	S 28	359,25	•	•
	S 29	367,25	•	
	S 30	375,25	•	•
	S 31	383,25	•	
	S 32	391,25	•	•
	S 33	399,25		
	S 34	407,25	•	•
	S 35	415,25	•	
	S 36	423,25	•	•
S 37	431,25	•		

Extended Superband	Channel	(MHz)	Telekom ¹⁾ channel plan 36 Channels	CENELEC-Plan ²⁾ 19/29/42 Channels
Extended Superband	S 38	439,25	•	•
	S 39	447,25		•
	S 40	455,25		
	S 41	463,25		•
IV	21	471,25	•	
	22	479,25	•	•
	23	487,25	•	
	24	495,25	•	•
	25	503,25	•	
	26	511,25	•	•
	27	519,25	•	
	28	527,25	•	•
	29	535,25	•	
	30	543,25	•	•
	31	551,25	•	
	32	559,25	•	
	33	567,25	•	•
	34	575,25	•	
	35	583,25	•	•
	36	591,25	•	
	V	37	599,25	•
38		607,25		
39		615,25		
40		623,25		
41		631,25		
42		639,25		
43		647,25		
44		655,25		
45		663,25		•
46		671,25		
47		679,25		•
48		687,25		
49		695,25		•
50		703,25		
51		711,25		•
52		719,25		
53		727,25		•
54	735,25			
55	743,25		•	
56	751,25			
57	759,25		•	
58	767,25			
59	775,25		•	
60	783,25			
61	791,25		•	
62	799,25			
63	807,25		•	
64	815,25			
65	823,25		•	
66	831,25			
67	839,25		•	
68	847,25			
69	855,25		•	

¹⁾ accord. to FTZ 156 TR 4, Telekom channel plan 7/8 MHz (450 MHz).
54 channels up to 606 MHz.

²⁾ accord. to DIN EN 50083-3, 19 channels up to 450 MHz, 29 channels up to 606 MHz, 42 channels up to 862 MHz.